


Specifications:

Current rating:1.0A AC/DC
 Voltage rating:100V AC/DC
 Contact resistance:15m ohm. max.
 Insulator resistance:5000M ohm. Min.
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C to +105°C
 Material and Finish:
 Insulator:PBT (UL94V-0)
 Standard Color:Black
 Contact:Beryllium Copper(Becu) Gold Plated
 Sleeve Barrel:Copper Alloy Tin Plated

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
24	30.48	27.94	17.78	15.24	06
28	35.56	33.02	17.78	15.24	
32	40.64	38.10	17.78	15.24	
40	50.80	48.26	17.78	15.24	
42	53.34	50.80	17.78	15.24	
48	60.96	58.42	17.78	15.24	

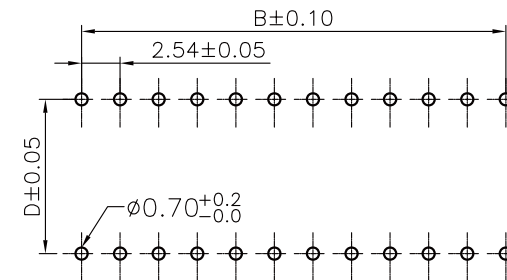

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

SIC-D06-xx-LF
 SERIES | LEADFREE
 24~48WAY
 SPACING 15.24mm
 DIP

DESCRIPTION: 2.54mm IC Socket Machine Pin