
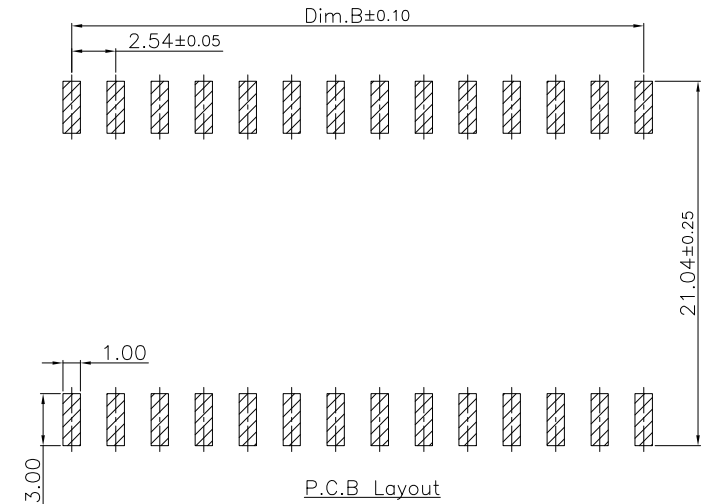
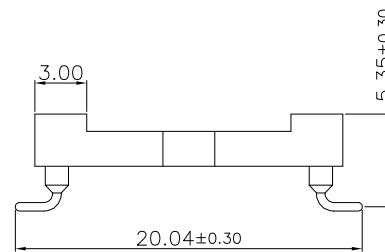


Dimension Information:

Pin.No	Dim.A	Dim.B	Middle Bar
12	15.24	12.70	without middle bar
16	20.32	17.78	
18	22.86	20.32	
20	25.40	22.86	
24	30.48	27.94	
28	35.56	33.02	with middle bar
32	40.64	38.10	
36	45.72	43.18	
40	50.80	48.26	
42	53.34	50.80	
48	60.96	58.42	
50	63.50	60.96	
52	66.04	63.50	
60	76.20	72.66	
64	81.28	78.74	

Specifications:
 Current Rating: 3.0A AC,DC
 Voltage Rating: 60V AC,DC
 Contact Resistance: 4m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Operating Temperature Range: -40°C ~ +105°C

Material:
 Insulator: High Temperature Plastic(UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy,Gold Plated.
 Sleeve Barrel: Copper Alloy,Tin Plated.

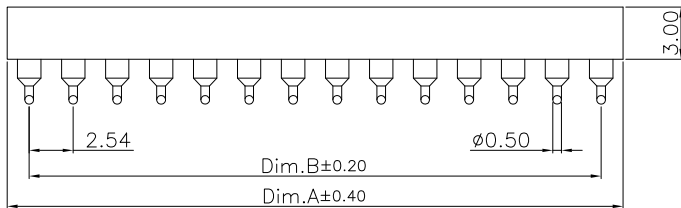

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

SIC-V06-xx-LF
 SERIES | LEADFREE
 24~48WAY
 SPACING 15.24mm
 180° SMT

DESCRIPTION: 2.54mm IC Socket Machine Pin SMD Type