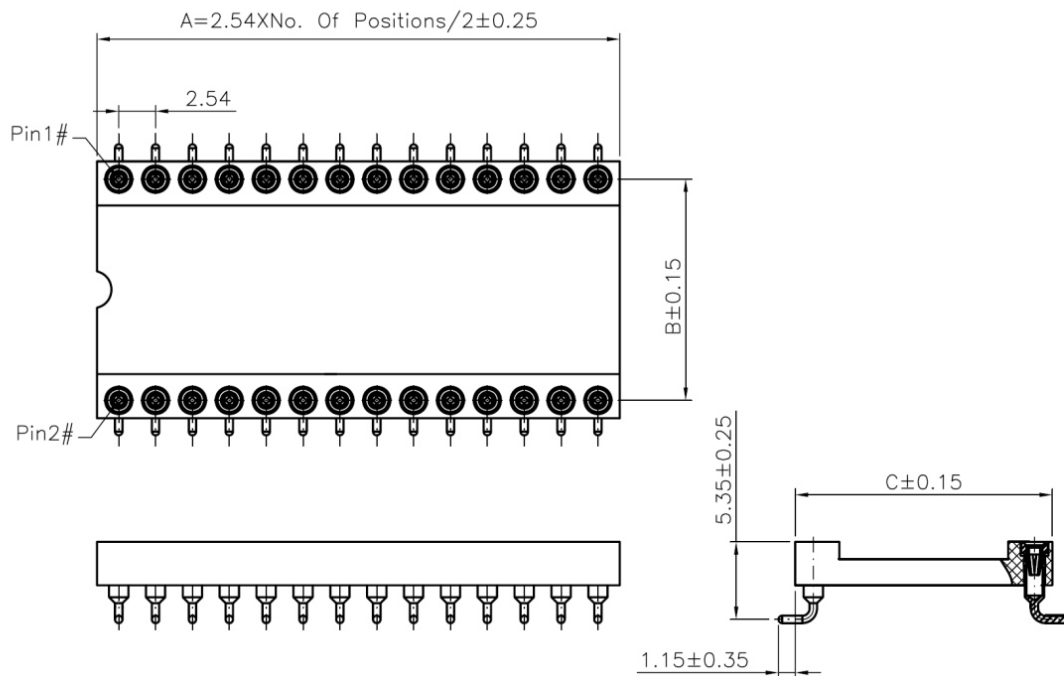


Specifications:

Current rating:1.0A AC/DC

Voltage rating:100V AC/DC

Contact resistance:15m ohm. max.

Insulator resistance:5000M ohm. Min.

Withstanding voltage:1000V AC for one minute

Operating temperature range:-40°C to +105°C

Material and Finish:


Insulator:High Temp. Plastic(PPS UL94V-0)

Standard Color:Black

Contact:Beryllium Copper(Becu) Gold Plated

Sleeve Barrel:Copper Alloy Tin Plated

Circuits	DIM.A	DIM.B	DIM.C	Spacing	Circuits	DIM.A	DIM.B	DIM.C	Spacing
6	7.62	7.62	10.16	03	26	33.02	7.62	10.16	03
8	10.16	7.62	10.16		28	35.56	7.62	10.16	
10	12.70	7.62	10.16		24	30.48	15.24	17.78	06
12	15.24	7.62	10.16		28	35.56	15.24	17.78	
14	17.78	7.62	10.16		32	40.64	15.24	17.78	
16	20.32	7.62	10.16		36	45.66	15.24	17.78	
18	22.86	7.62	10.16		40	50.80	15.24	17.78	
20	25.40	7.62	10.16		42	53.34	15.24	17.78	
22	27.94	7.62	10.16		48	60.96	15.24	17.78	
24	30.48	7.62	10.16						

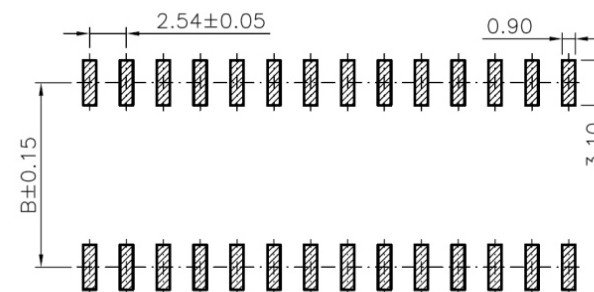

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SIC-VxxA-xx-LF
SERIES | LEADFREE
06~48 WAY
NON HOLE
03:7.62mm
06:15.24mm
180°SMT

DESCRIPTION: