



### SIMM SOCKET MATERIALS

- \* body: liquid crystal polstal (lcp)UL 94V-0
- \* contact: bronze
- \* contact plated: tin plated over nicket
- \* recommended industry standard modules (1.19mm to 1.37mm thick)

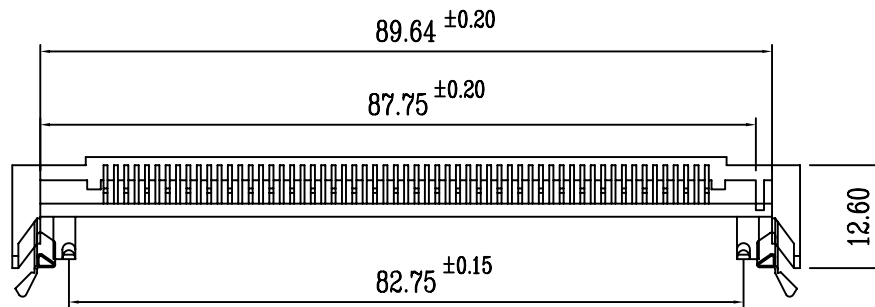

### SPECIFICATION

- \* contact current rating: 1 AMP
- \* contact resistance: 30 milli OHMS Max.
- \* insulation resistance: 1000M OHMS at 500V DC
- \* dielectric withstanding voltage: 2.54mm pitch 1000V AC for one minute
- \* capacitance: 1pf Max.
- \* durabion: 30 circle, Min.
- \* insertion force: 0 grams
- \* contact force: 74 grams, Min.
- \* operating and storage temperature: -40°c to +100°c

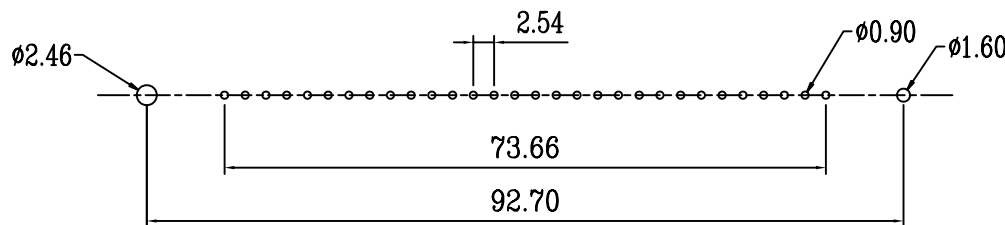

P.C.B. layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

SIM-A-1X30-LF  
SERIES | LEADFREE  
30 WAY  
SLANT DIP

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: SIMM SOCKET 1X30p Low profile 26°