
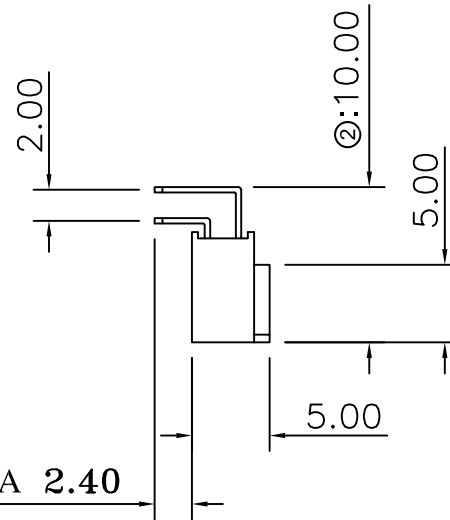




Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds

③: Contact Material: Brass
 Insulator Material: High Temperature Polyester, UL 94V-0

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

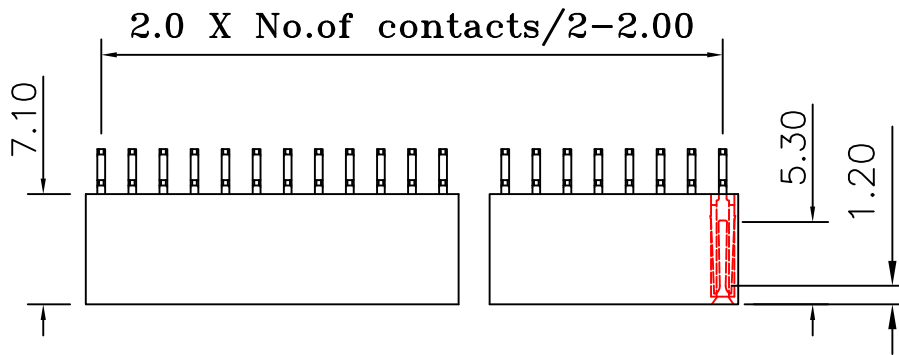

Recommended P.C. Board Hole Layout

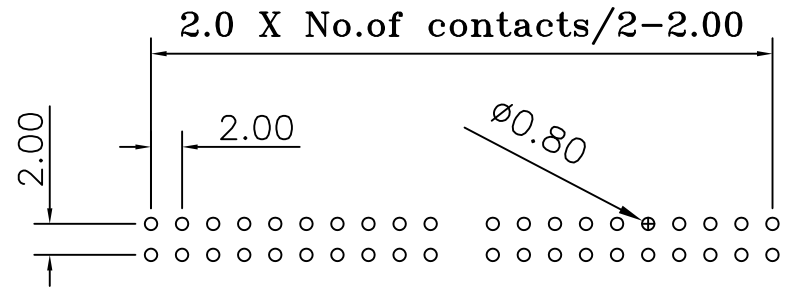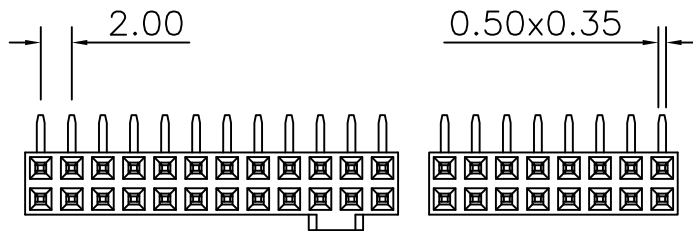

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION



ORDER INFORMATION

SK-R71-2Xxx-LF
 SERIES LEADFREE
 2X02:04 WAY
 2X40:80 WAY
 HIGH 7.1mm
 DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: