

Specifications


- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Max. Process Temp. : 230°C for 30~60 Seconds
(260°C for 10 Seconds)
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
Standard : Nylon-6T
- Contact Plated : Full Gold, Full Tin, Selective Plated

SK-V45P-2Xxx-LF

LEADFREE

RoHS Compliant

Recommended
P.C. Board Hole Layout

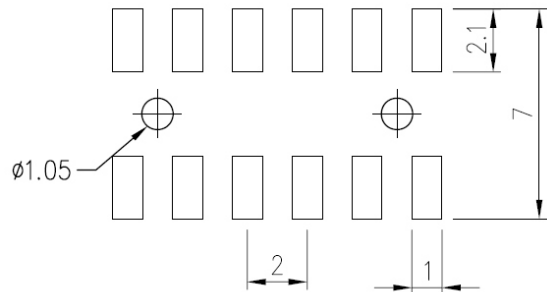

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **SK-V45P-2Xxx**

DWG NO. **SK-V45P-2Xxx**

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE