







4-20P




2P



3P



4-20P

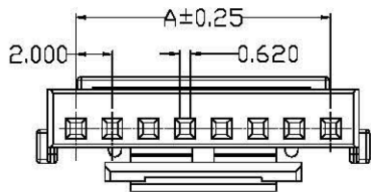

PART NO	Material	Q' ty/Bag
SLK-H-xx	Nylon 66 UL 94V-0	1,000Pcs

■ Specifications(规格) :

- Voltage rating(额定电压): 125V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

Poles	Dimensions(mm)					
	A	B	C	D	E	F
2	2.00	5.10	7.17			
3	4.00	7.10	9.17			
4	6.00	9.10	10.30	5.80	4.00	6.40
5	8.00	11.10	12.30	7.80	4.00	6.40
6	10.00	13.10	14.30	9.80	4.00	6.40
7	12.00	15.10	16.30	11.80	4.00	6.40
8	14.00	17.10	18.30	13.80	8.00	10.80
9	16.00	19.10	20.30	15.80	8.00	10.80
10	18.00	21.10	22.30	17.80	8.00	10.80
11	20.00	23.10	24.30	19.80	8.00	10.80
12	22.00	25.10	26.30	21.80	8.00	10.80
13	24.00	27.10	28.30	23.80	8.00	10.80
14	26.00	29.10	30.30	25.80	8.00	10.80
15	28.00	31.10	32.30	27.80	8.00	10.80
16	30.00	33.10	34.30	29.80	8.00	10.80
17	32.00	35.10	36.30	31.80	8.00	10.80
18	34.00	37.10	38.30	33.80	8.00	10.80
19	36.00	39.10	40.30	35.80	8.00	10.80
20	38.00	41.10	42.30	37.80	8.00	10.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PJECTION

照片框

ORDER INFORMATION

SLK-H-xx-LF
SERIES | LEADFREE
02-20WAY
HOUSING

DESCRIPTION: