


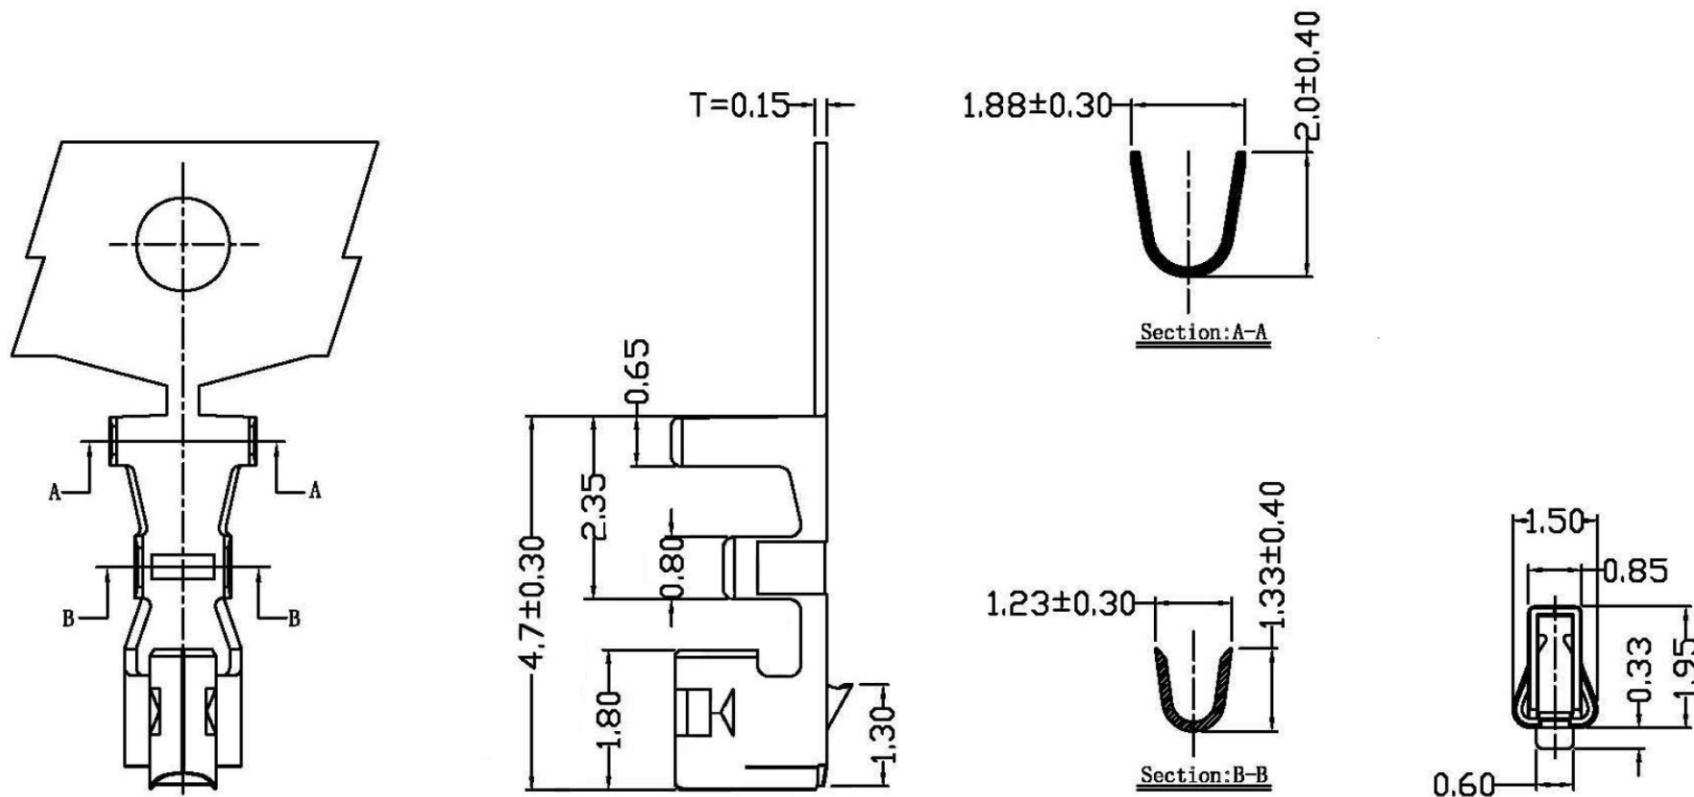

■ Specifications(规格) :

- Voltage rating(额定电压): 125V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000\text{M}\Omega$
- Contact resistance(接触电阻): $\leq 20\text{m}\Omega$
- After environmental testing(环境测试后): $\leq 30\text{m}\Omega$

PART NO	Material	Wire Range	Finish	Q' ty/Reel
	Phosphor Bronze	AWG#24-30	Stamping Before Plating:30~50u" Ni;70~120u"Sn	10,000Pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SLK-T-24-LF
SERIES | LEADFREE
24~30 AWG
TERMINAL

DESCRIPTION: