

## Small square connectors 15,5 x 15,5 mm with electronic components

<b>Housing colour:</b>	Transparent	
<b>Type of contact:</b>	Screw with conductor protection	
<b>Contact spacing:</b>	9,4 mm	
<b>Number of poles:</b>	2 poles + earth	
<b>Standard earth position:</b>	12h	
<b>Cable entry:</b>	PG7	
<b>Maximum conductor section:</b>	0,75 mm <sup>2</sup>	
<b>Fixing screw:</b>	M2,5 x 28,5	
<b>Profile gasket:</b>	NBR (Nitril and Silicon upon request)	
<b>Protection class:</b>	IP 65 assembled	
<b>Packaging:</b>	100 pcs. with fixing screw and gasket	

Electrical Scheme	Circuit	Housing	Cable Entry	Voltage	CODE	Price
	<b>LO</b> Bipolar LED to signal voltage presence	Transparent	PG7	24V	P2TZ2LO1	SLN94-SARLOV0-2E
				115V	P2TZ2LO2	SLN94-SARLOV1-2E
				230V	P2TZ2LO3	SLN94-SARLOV2-2E
	<b>VL</b> Bipolar LED to signal voltage presence + VARISTOR for protection from overvoltage caused by the network or by the load	Transparent	PG7	24V	P2TZ2VL1	SLN94-SARVLV0-2E
				115V	P2TZ2VL2	SLN94-SARVLV1-2E
				230V	P2TZ2VL3	SLN94-SARVLV2-2E
	<b>DL</b> Bipolar LED to signal voltage presence + DIODE for protection from overvoltage caused by the opening of the load	Transparent	PG7	24V	P2TZ2DL1	SLN94-SARDLV0-2E
				115V	P2TZ2DL2	SLN94-SARDLV1-2E
				230V	P2TZ2DL3	SLN94-SARDLV2-2E

Standard Colour of LED: red

For any special request, please contact us

**RoHS Compliant**

TOLERANCES ARE

MORETHANALL

PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		


[www.morethanall.com](http://www.morethanall.com)

SIZE A4      PROJECTION

照片框

**ORDER INFORMATION**

SLN09-SARxxVx-2E-LF

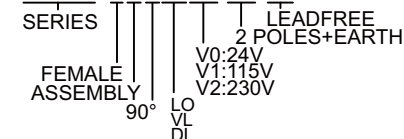

DESCRIPTION: