



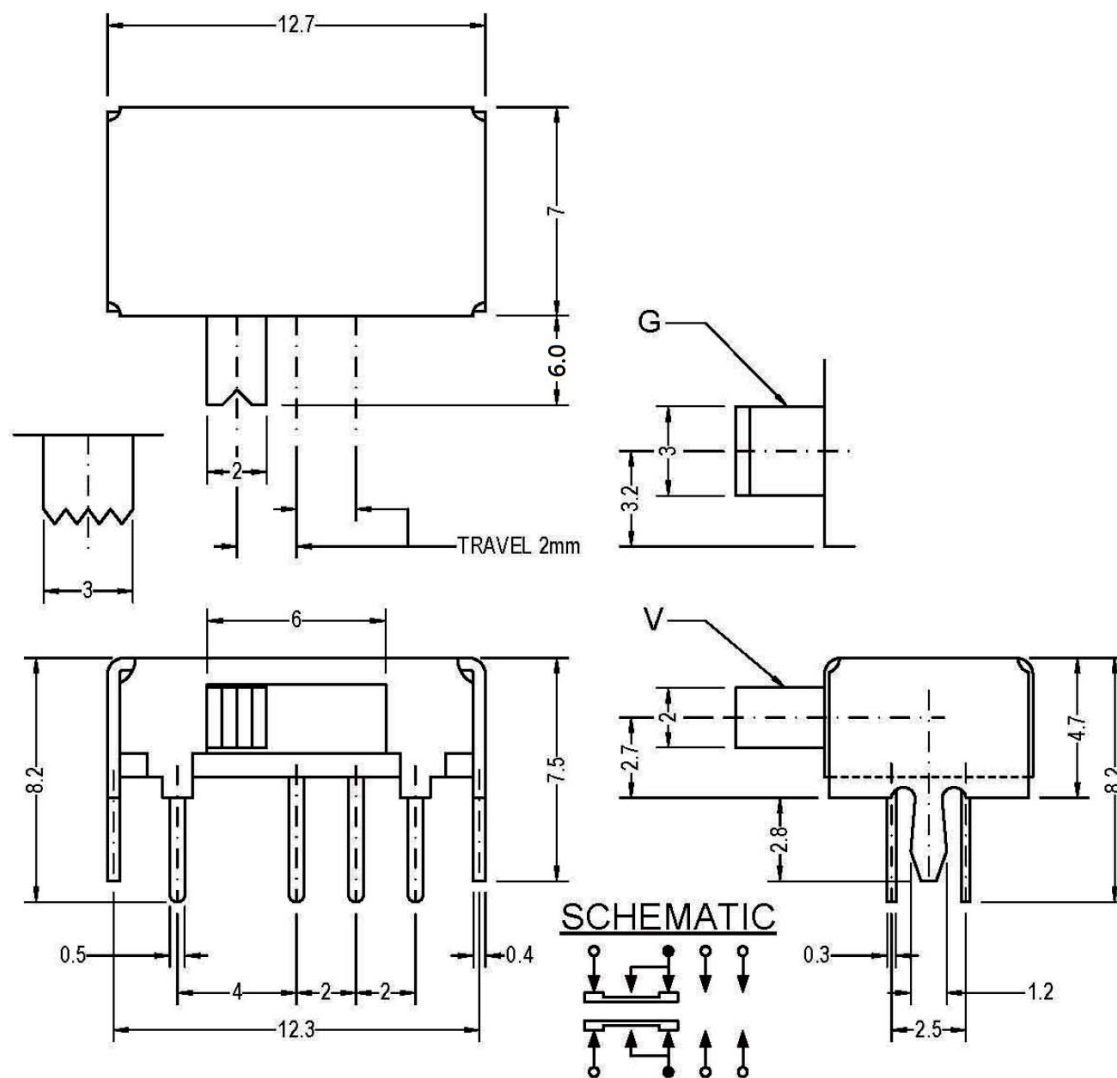

General specifications

Circuit	: ON-ON-ON(2P3T)
Rating	: D.C. 50V 0.3A
Contact R.[max]	: D.C. 5V 1A 30mΩ
Insulation R.[min]	: D.C. 500V 100MΩ
Withstand VOL.	: A.C. 500V 1minute
Timing	: Shorting
Operating force	: 300±100g
Life cycle[max]	: 10,000 CYCLES

P.C.B. HOLE DETAIL

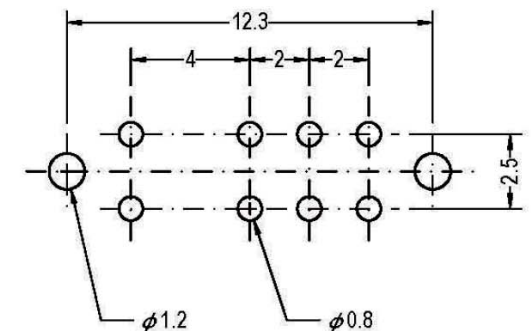

MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	QTY	FINISH
1	KNOB	POM	1	BLACK
2	HOUSING	STEEL STRIP	1	NI PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
4	TERMINAL	BRASS STRIP	8	AG PLATED OVER NI PLATED
5	CONTACT CLIP	PBS C5210R-EH	2	AG CLAD
6	SPRING	STAINLESS STEEL	1	NATURAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

SLSW20-RM060-2X05E2P-LF

SERIES

LEADFREE
EMPTY 2nd PIN
10 WAY
KNOB LENGTH 6.0mm
METAL SHIELD
DIP 90°

DESCRIPTION: