
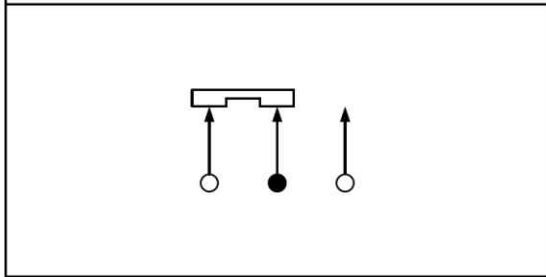




General specifications

| | |
|--------------------|---------------------|
| Circuit | : ON-ON(1P2T) |
| Rating | : D.C. 50V 0.3A |
| Contact R.[max] | : D.C. 5V 1A 30mΩ |
| Insulation R.[min] | : D.C. 500V 100MΩ |
| Withstand VOL. | : A.C. 500V 1minute |
| Timing | : Non Shorting |
| Operating force | : 300±100g |
| Life cycle[max] | : 10,000 CYCLES |


SCHEMATIC



P.C.B. HOLE DETAIL

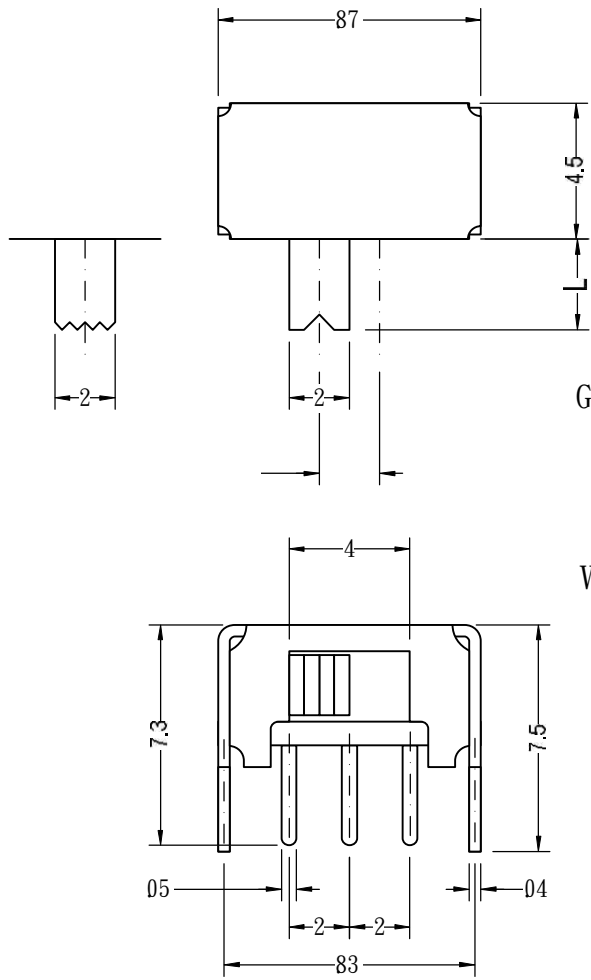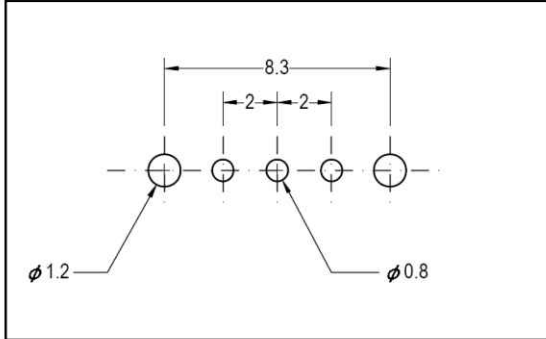

按柄長度Knob Length(L) (mm)

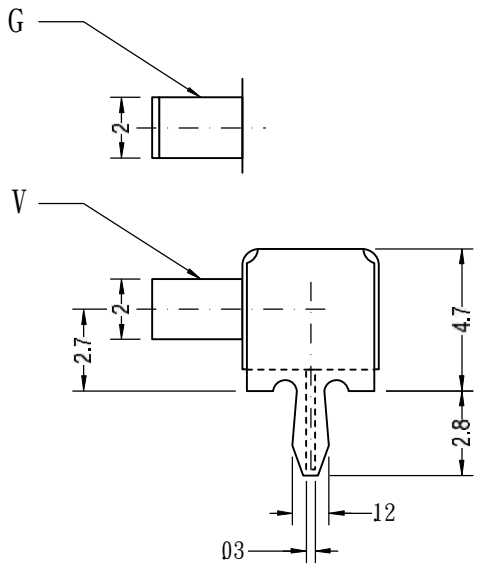

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SLSW20-RMxxx-1X03-LF
SERIES | LEADFREE
03 WAY
L: KNOB LENGTH mm
METAL FOOT
DIP 90°

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: