



General specifications

Circuit :ON-ON(4P2T)
 Rating :D.C. 50V 0.3A
 Contact R. [max] :D.C. 5V 1A 30mΩ
 Insulation R. [min] :D.C. 500V 100MΩ
 Withstand VOL. :A.C. 500V 1minute
 Timing :Shorting
 Operating force :300± 100g
 Life cycle[max] :10,000 CYCLES


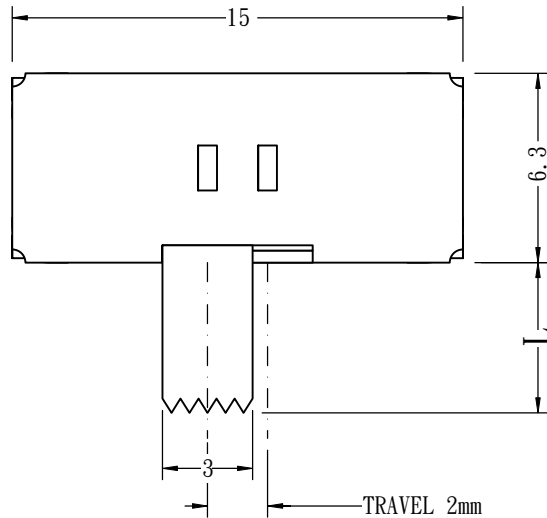


SCHEMATIC




MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	FINISH
A	KNOB	POM	Black
B	FRAME	Steel Strip	Ni Plated
C	TERMINAL	Brass Strip	Ag Plated Over Ni Plated
D	TERMINAL BASE	Phenolic Resin	Natural
E	SPRING PLATE	Stainless Steel	Natural
F	CLIP	PBS C5210R-EH	Ag Plated

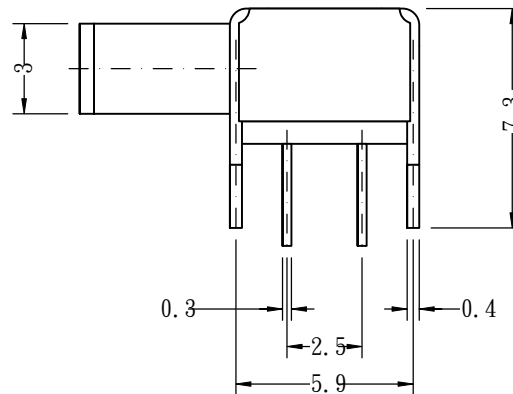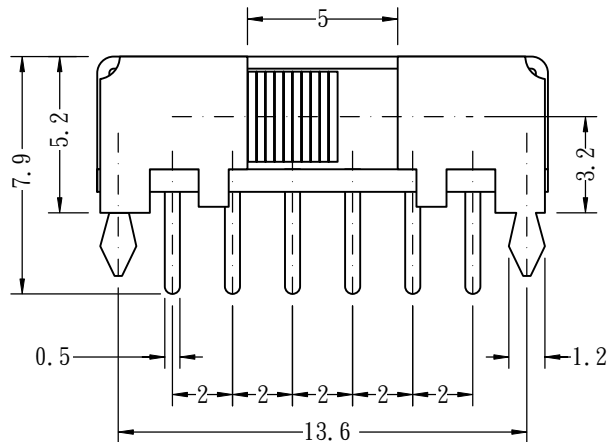

P. C. B. HOLE DETAIL

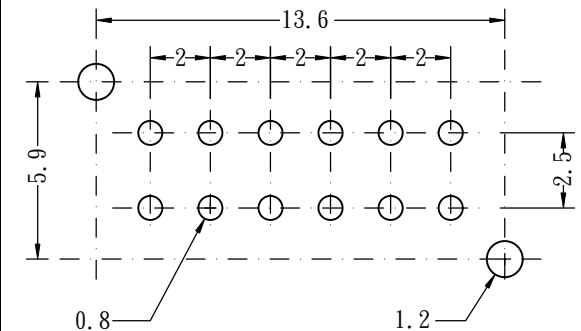

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SLSW20-RMxxx-2X06-LF

SERIES

LEADFREE

12 WAY

L: KNOB LENGTH mm

METAL FOOT

DIP 90°

DESCRIPTION: