
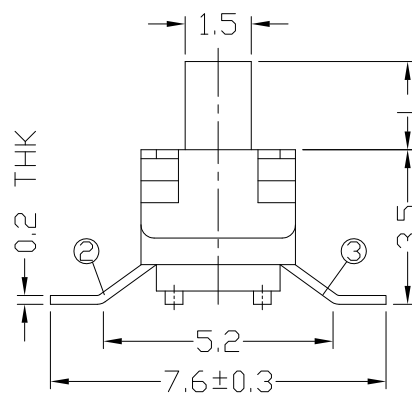
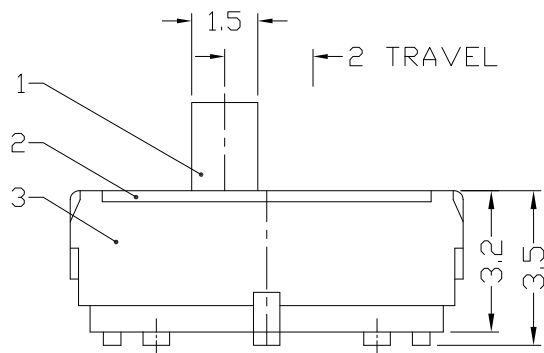
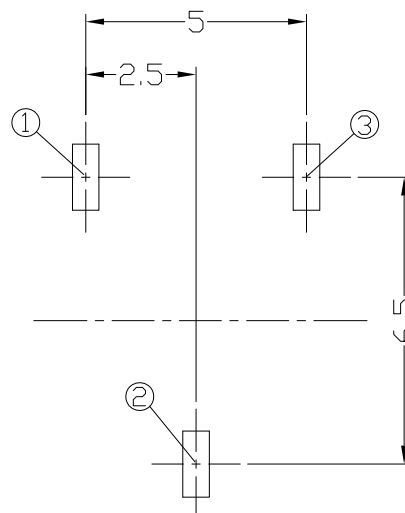


CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	70mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

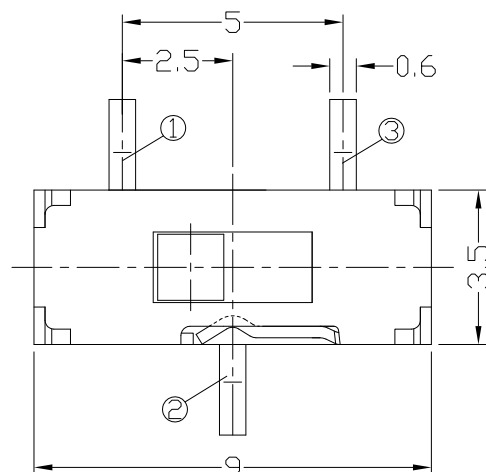

P.C.B LAYOUT
TOP VIEW

4	CONTACT	PBS WIRE	1	NATURAL
3	CASE	PA6T/BRASS STRIP	1	BLACK/Ag PLATED
2	COVER	SUS	1	NATURAL
1	KNOB	PA6T	1	BLACK
NO.	PARTS	MATERIAL	Q'TY	FINISHING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X ± 0.30
Y ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

SLSW25-V35Xxx-1X03R-LF

SERIES

180°SMT
HIGH 3.5mm
NON POST

L: 03 WAY
LEADFREE
R TYPE FOOT

20:HANDLE HIGH 2.0mm
30:HANDLE HIGH 3.0mm
40:HANDLE HIGH 4.0mm

DESCRIPTION: