

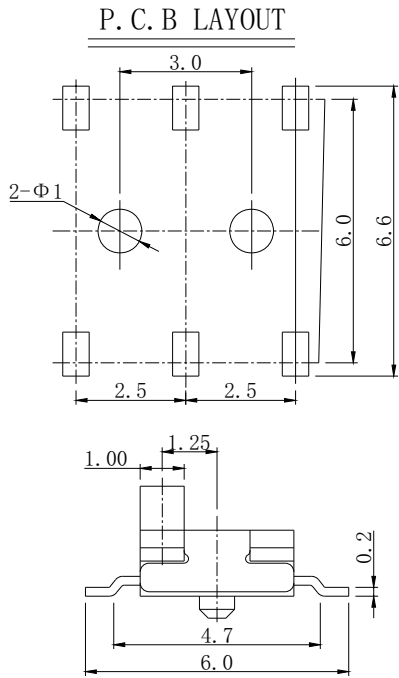


类窗型	滑动开关	品 名	
1. 功能规格			
1.1额定电压	DC4V	1.6自由位置 (FP)	
1.2额定电流	300 mA	1.7动作位置 (OP)	
1.3接触电阻 (CR)	$\leq 100\text{m}\Omega$	1.8行程 (PT)	$1.5 \pm 0.2\text{mm}$
1.4操作力 (OF)	$200 \pm 120\text{gf}$	1.9灵敏度 (BT)	$\leq 5\text{ms}$
1.5回弹力 (RF)		1.10	
2. 可靠度参数			
2.1机械寿命	10,000 cycles	2.5焊接工艺	手工焊、回流焊
2.2电气寿命	10,000 cycles	2.6适用温度	$-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2.3绝缘电阻 (IR)	$\geq 100\text{M}\Omega$ DC500V	2.7适用湿度	$<85\%\text{RH}$
2.4耐压强度 (WV)	AC100V 1 minute	2.8	

3. 尺寸规格图

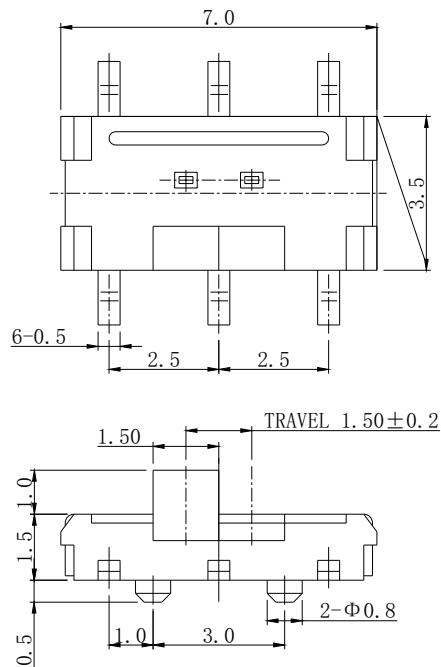

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SLSW25-VP-2X03-LF
SERIES POST 06 WAY LEADFREE
180°SMT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PPOJECTION

DESCRIPTION: