


P.C.B LAND PATTERN





CIRCUIT DIAGRAM

| MODEL NO. | 010 | 015 | 020 | 030 |
|-----------|-----|-----|-----|-----|
| L (mm) | 1.0 | 1.5 | 2.0 | 3.0 |
| H (mm) | 2.5 | 3.0 | 3.5 | 4.5 |

SPECIFICATIONS

| | |
|---------------------------------|--------------------|
| Rating | 0.3A 4V DC |
| Insulation Resistance | 50MΩ Min. |
| Dielectric Withstanding Voltage | AC 250 V(50Hz)1min |
| Contact Resistance | 100mΩ Max. |
| Operating Force | 170 ± 50gf |
| Operating Life | 10,000 cycles |

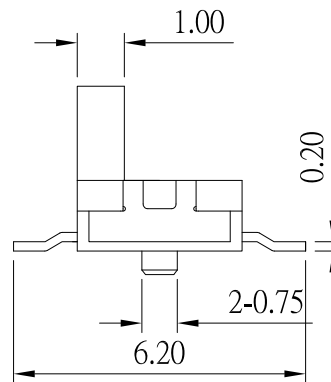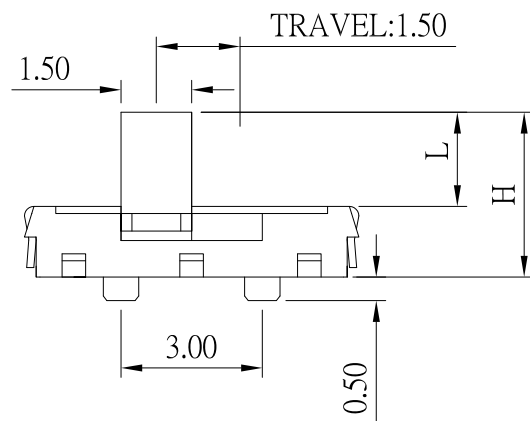

| E | TERMINAL | 6 | PHOSPHOR BRONZE | Ag plated |
|-----|-------------|-----|-----------------|-----------|
| D | CLIP | 2 | BECU | Ag plated |
| C | COVER | 1 | SUS | |
| B | CASE | 1 | LCP | Black |
| A | SLIDER | 1 | PA46 | Black |
| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

SLSW25-VPxxx-2X03-LF

SERIES

LEADFREE

06 WAY

010:HANDLE HIGH 1.0mm

030:HANDLE HIGH 3.0mm

180°SMT

POST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: SLIDE SWITCH