




General specifications

Circuit : ON-ON(1P2T)
 Rating : D.C. 50V 0.5A
 Contact R.[max] : D.C. 5V 1A 30m Ω
 Insulation R.[min] : D.C. 500V 100M Ω
 Withstand VOL. : A.C. 500V 1minute
 Timing : Non Shorting
 Operating force : 300 $\pm$ 100g
 Life cycle[max] : 10,000 CYCLES



SCHEMATIC



P.C.B HOLE DETAIL

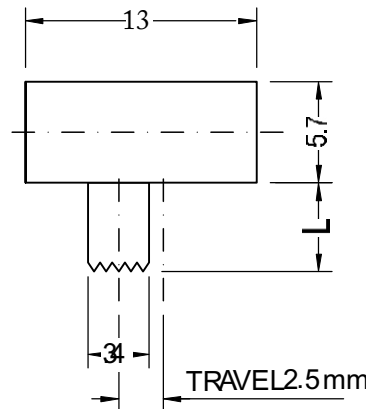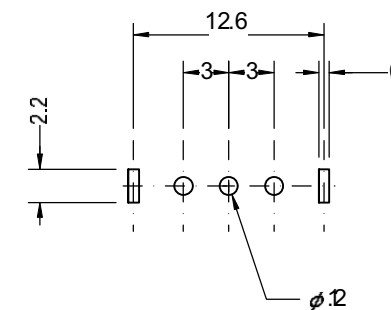

L:03~10mm

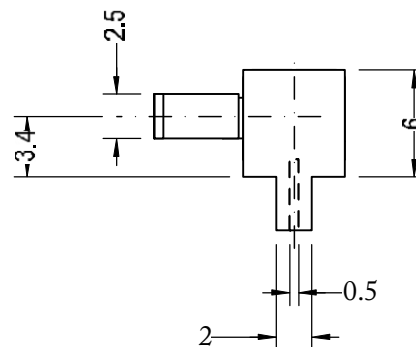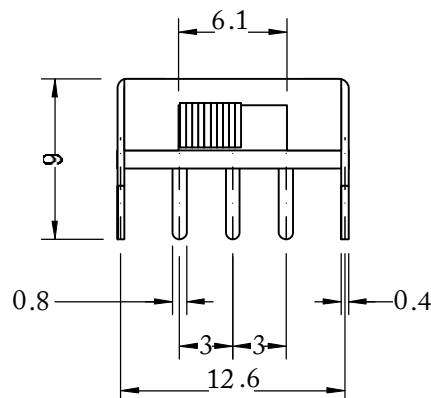

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION



ORDER INFORMATION

SLSW30-RMxx-1X03-LF

SERIES

LEADFREE

03 WAY

03:03mm

DIP 90°

METAL FOOT

DESCRIPTION: