


動作特性
Switching function(Circuit) : 3P SPDT ON-ON

規格
Rating : 3A 125V, 1.5A 250V AC

接觸電阻
Contact resistance : 50 mΩ Max

絕緣電阻
Insulation resistance : DC 500V 100MΩ Min

耐電壓
Voltage breakdown : AC 1000V 1 minute

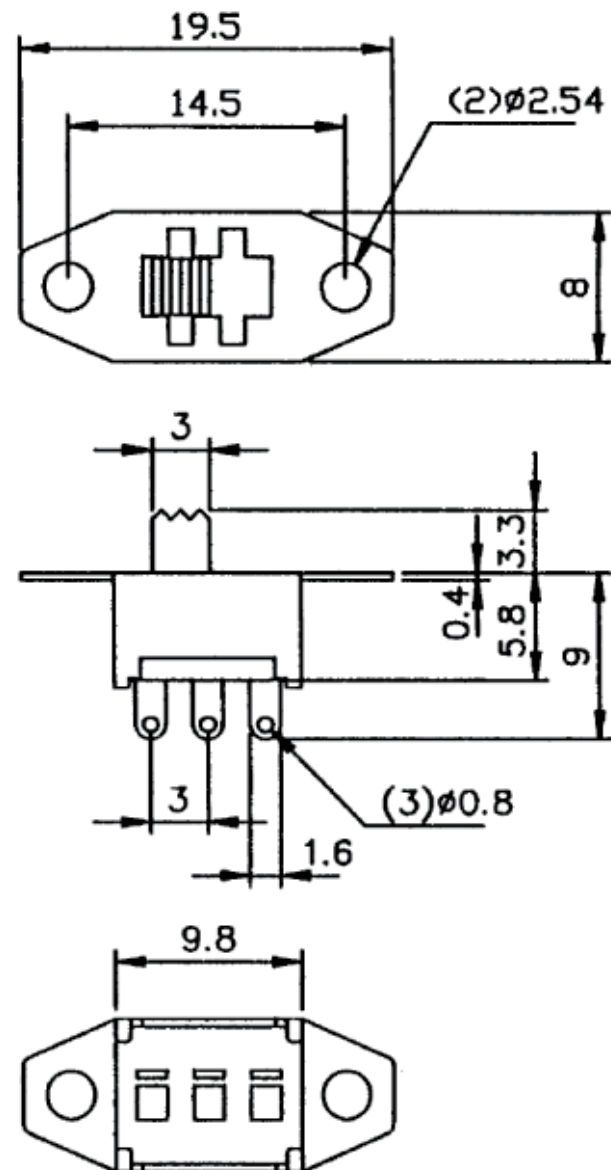

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SLSW30-SPE033-1X03-LF

SERIES

LEADFREE
03 WAY
3.3mm KNOB LENGTH
PANEL
SOLDER

DESCRIPTION: 滑動開關