


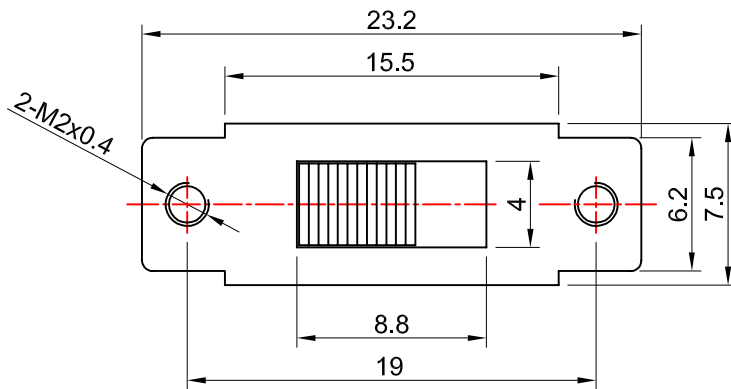
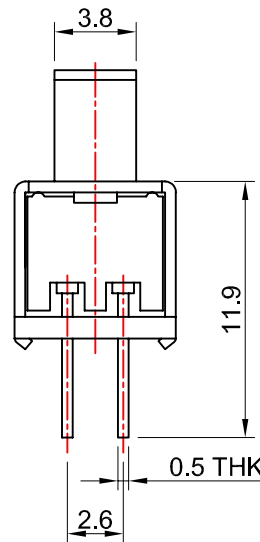


SCHEMATIC(NON-SHORTING)

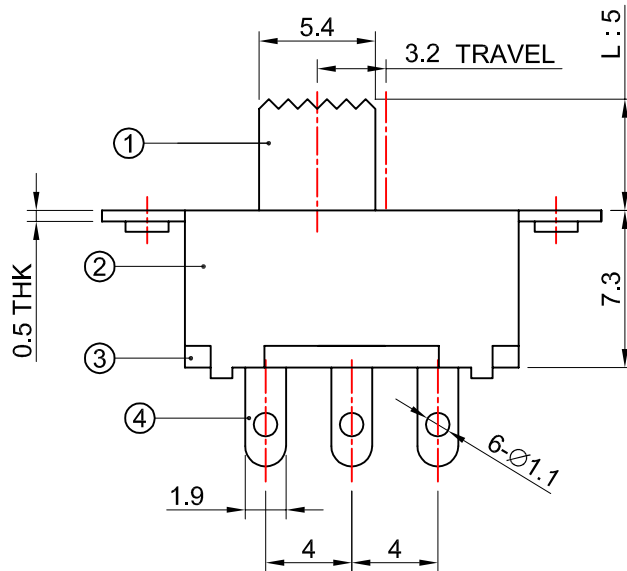

P.C.B. LAYOUT



SPECIFICATION

Rating: 0.5A 50V DC.

Contact resistance: 30mΩ Max (Initial).

Insulation resistance: 100MΩ at 500V DC.

Withstand voltage: 500V AC for 1 minute.

Switching life: 10,000 Cycles
(unloading/15-18 Cycles per minute).

Soldering temperature: 230±5° C for 3 Sec.

MATERIAL

Knob: POM, Black. ①

Frame: Steel strip, Black. ②

Terminal Base: Phenolic resin, Natural. ③

Terminal: Brass strip, Ag plated over Ni plated. ④

Spring: Steel wire, Temper.

Contact: Copper strip, Ag plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SLSW40-SPE050-2X03-LF

SERIES

LEADFREE

6 WAY

5.0mm KNOB LENG

PANEL
SOLDER

DESCRIPTION: Slide Switch