
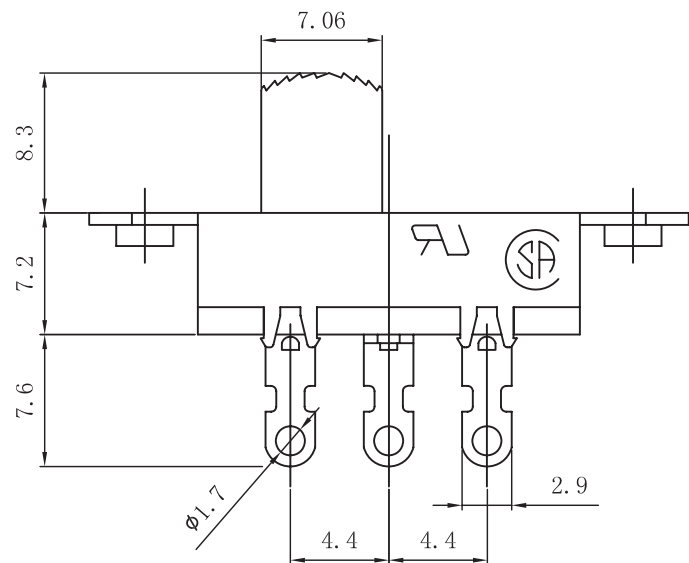



# SPECIFICATION:

|                            |                         |
|----------------------------|-------------------------|
| CONTACT RATING             | : 5A 250VAC (UL )       |
|                            | 10A 125VAC uT85~(SP )   |
| INITIAL CONTACT RESISTANCE | :30Milliohm Max.        |
| INSULATION RESISTANCE      | :500Megohms Min. 500VDC |
| WITHSTAND VOLTAGE          | :1,000 VAC-1 Minute.    |
| LIFE EXPECTANCY            | :OVER 10,000 Cycles.    |
| OPERATING FORCE            | :650±200gf.             |

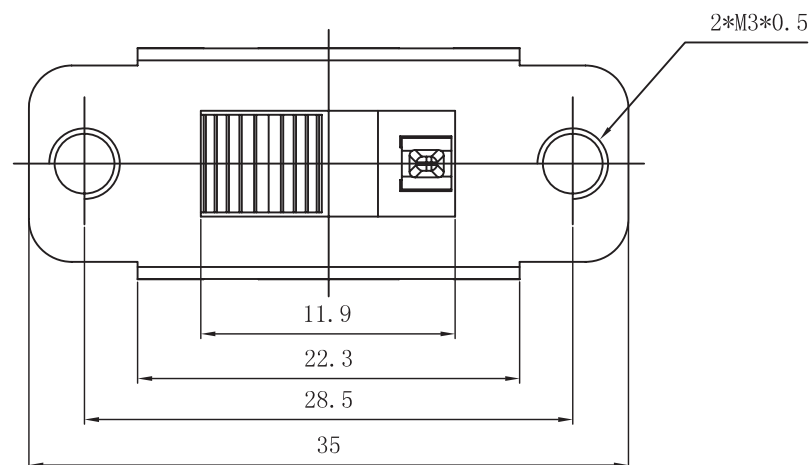

| 主要尺寸 (*) |      | 主要尺寸 |      |
|----------|------|------|------|
| A1       | 35.0 | A    | 11.9 |
| B1       | 22.3 | B    | 7.6  |
| C1       | 7.6  | C    | 8.3  |
| D1       | 13.5 | D    | 5.7  |
|          |      | E    |      |
|          |      |      |      |
|          |      |      |      |
|          |      |      |      |
|          |      |      |      |
|          |      |      |      |
|          |      |      |      |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SLSW44-SPE083-1X03R-LF

SERIES

LEADFREE

R TYPE FOOT

3 WAY

8.3mm KNOB LENG

PANEL

SOLDER

DESCRIPTION: