




版本：V2.2

*開關產品未經 同意，請勿拆解，否則無法負品質及安全責任。

Please do not decompose the switch without any permission from otherwise the quality and safety responsibility could not be guaranteed.

*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。

Below is our main specification if different from catalog.

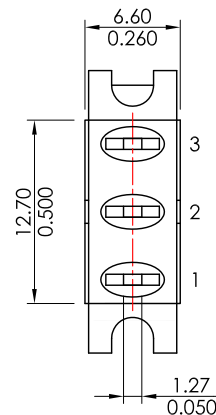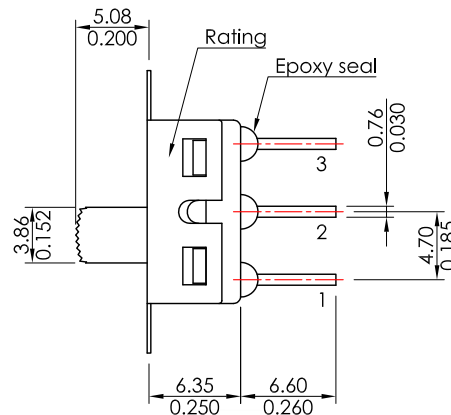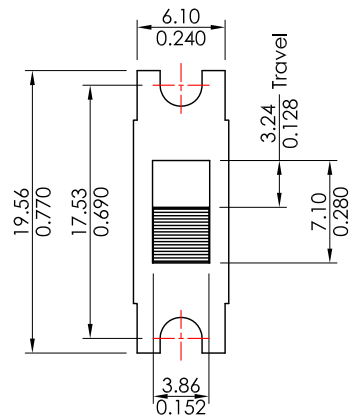

P.C.B. LAYOUT

PANEL MOUNTING

SPECIFICATION

Rating: 2A @250V AC.

5A @120V AC or 28V DC.

Contact resistance: 10mΩ Max. initial @2-4V DC.

100mA for both Silver and Gold plated contacts.

Insulation resistance: 1,000MΩ Min.

Withstand voltage: 1,000V RMS @sea level.

Operating temperature: -30°C ~ +85°C.

Mechanical life: 30,000 Cycles.



Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

Note3: Please fill the bag and add a desiccant seal to avoid product oxidation, when open the seal of S/W packing.

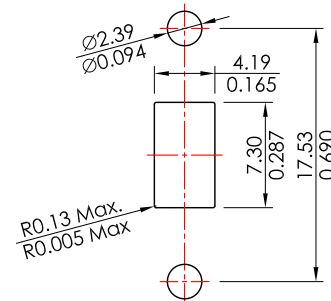

MATERIAL

Case: Diallyl phthalate. (DAP)(UL94V-0)


Actuator: Nylon, black std.

Housing: Stainless steel.

Contact: Copper alloy, Silver plated.

Terminal seal: Epoxy.

Model No.	POS.1	POS.2	POS.3
□	ON	NONE	ON
-3	ON	OFF	ON
Term. Com.	2-1		2-3
Schematic		OPEN	



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SLSW47-DE050-1X03-LF

SERIES

LEADFREE

03 WAY

LONG 5.08mm

EAR

DIP 180°

DESCRIPTION: