
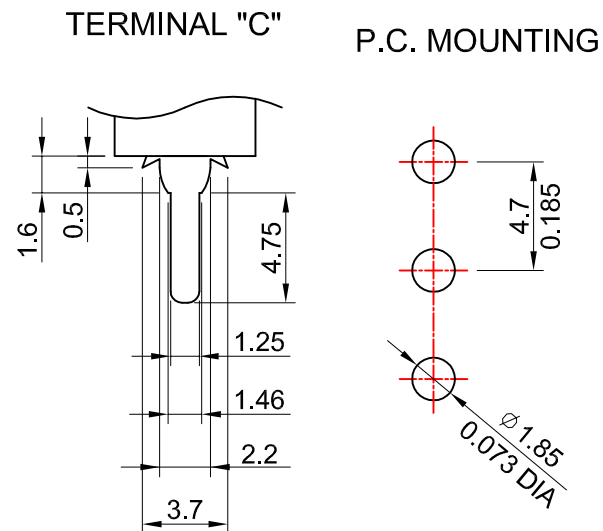
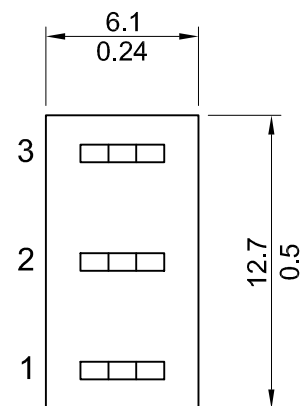


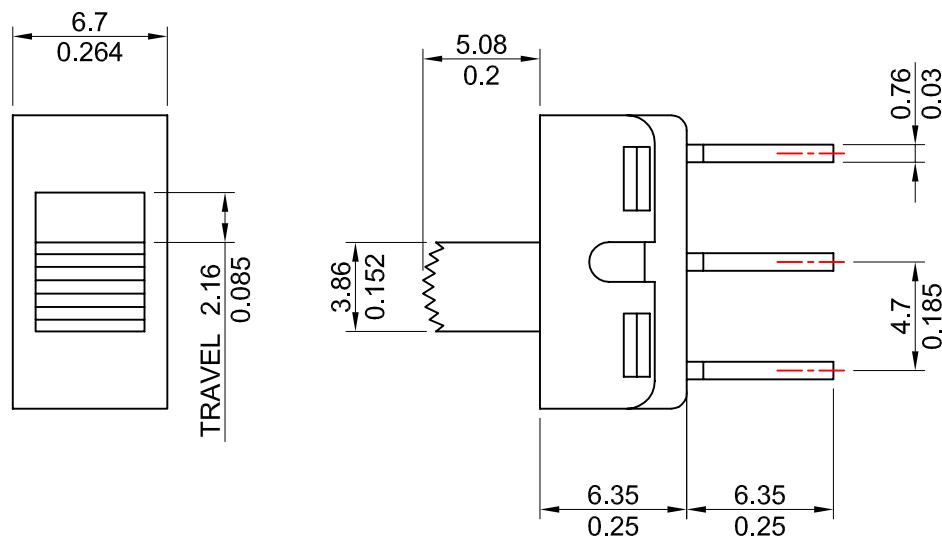

SPECIFICATION

Contact rating: 6A with resistive load @120V AC or 28V DC.

3A with resistive load @250V AC.

Contact resistance: 10mΩ Max. initially.

Electrical life: 30,000 actuations at full load.

Insulation resistance: 1,000MΩ Min.

Dielectric strength: 1,000V RMS @ sea level.

Operating temperature: -30°C ~ +130°C.

Soldering temperature: 240±5°C for 3 Sec.

Tolerance: .XX=±0.2mm, .X=±0.3mm.

MATERIAL

Case: Diallyl phthalate (DAP).

Housing: Stainless steel.

Slide handle: NYLON.

Contacts: Coin silver, silver plated.

Center contact & terminals: Brass, silver plated.

SWITCHING POSITION

□	ON		ON
-3	ON	OFF	ON
Term. Comm.	2-1	OPEN	2-3

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

ORDER INFORMATION

SLSW47-DM051-1X03-LF

SERIES

03 WAY

LONG 5.08mm

METAL

DIP 180°

LEADFREE

DESCRIPTION: Slide Switch