


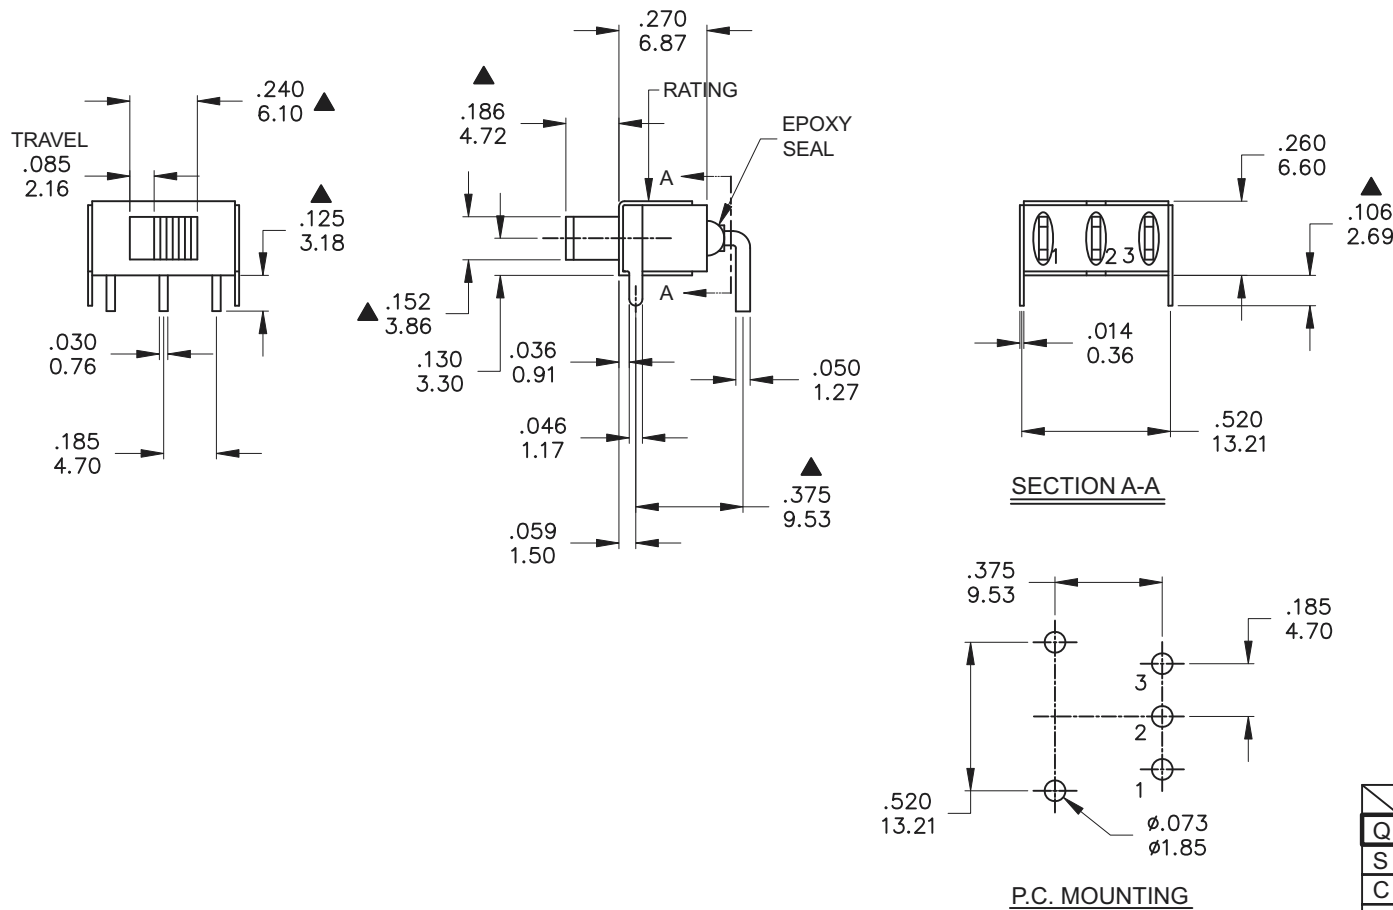

Model No.	POS.1	POS.2	POS.3
5MS1	ON	NONE	ON
Term. Comm.	2-1	N/A	2-3
SCHEMATIC			

SWITCH FUNCTION

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @sea level.

OPERATING TEMPERATURE: -40° to 85°.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0), Red.

ACTUATOR: Nylon, black std.

HOUSING: Stainless Steel.

CONTACT/TERMINALS: Copper alloy.

TERMINAL SEAL: Epoxy.

RoHS & Lead Free

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps @120 VAC or 28 VDC 2 Amps @250VAC
S		S = Silver, pure-tin	
C	Gold over Silver	C = Gold over silver	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)
K		K = Gold over silver, pure-tin	
R	Gold	R = Gold	
G		G = Gold, pure-tin	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

SLSW47-RM047-1X03-LF

SERIES

LEADFREE

03 WAY
LONG 4.7mm

METAL
DIP 90°

DESCRIPTION: Slide Switches