
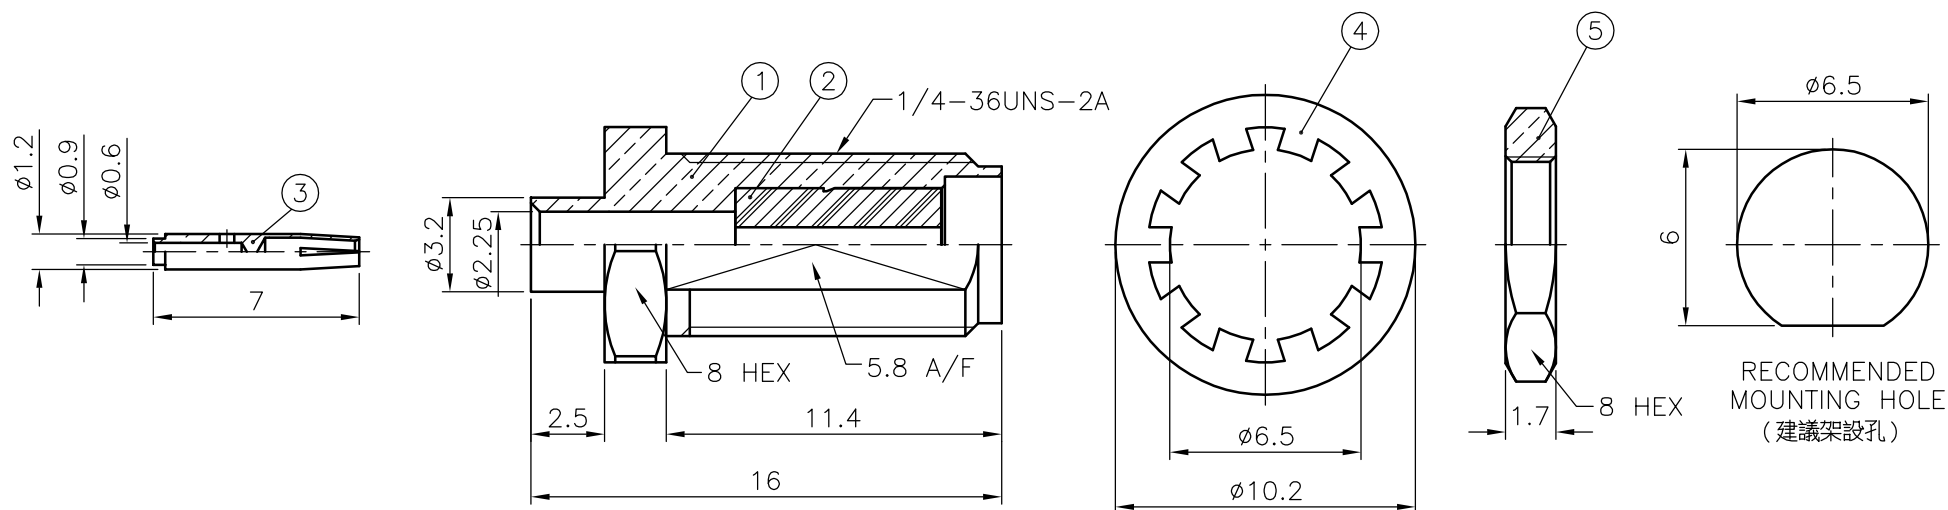


1. CONTACT PIN TO SOLDER
(中心針銲接)
2. MAX. PANEL THICKNESS=3.2mm
(最大板厚)

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BERYLLIUM COPPER PER QQ-C-530

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	NUT	NOTE 1	NOTE 2	1	C05-051G02
4	WASHER	SS41	NOTE 2	1	C03-061G02
3	CONTACT PIN	NOTE 5	NOTE 3	1	C01-418G
2	INSULATOR	NOTE 4	WHITE	1	C04-314
1	BODY	NOTE 1	NOTE 2	1	BD78-026-002GA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SMA-JCPBNW-085-LF
SERIES JACK CRIMP
LEADFREE
RG085
WASHER
NUT
PANEL BACK

DESCRIPTION: SMA BULKHEAD DIRECT SOLDER JACK (FOR .085",.086")