
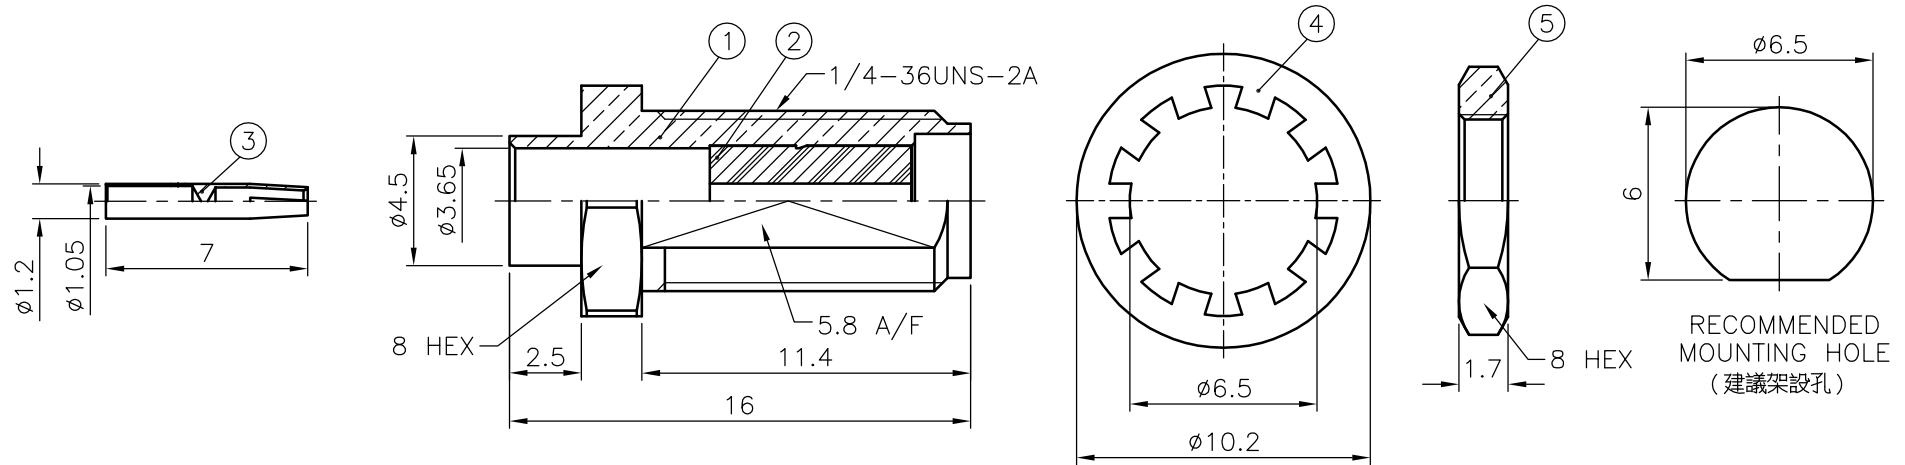




NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530

1. CONTACT PIN TO SOLDER
(中心針銲接)
2. MAX. PANEL THICKNESS=3.2mm
(最大板厚)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	NUT	NOTE 1	NOTE 2	1	C05-051G02
4	WASHER	SS41	NOTE 2	1	C03-061G02
3	CONTACT PIN	NOTE 5	NOTE 3	1	C01-417G
2	INSULATOR	NOTE 4	WHITE	1	C04-314
1	BODY	NOTE 1	NOTE 2	1	BD78-026-001GA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SMA-JCPBNW-141-LF
SERIES JACK CRIMP
LEADFREE
RG141
WASHER
NUT
PANEL BACK

DESCRIPTION: SMA BULKHEAD DIRECT SOLDER JACK (FOR .141")