


Electrical:

Impedance: 50 OHMS±10
 Frequency Range: DC ~ 18 GHz
 WORKING VOLTAGE: 335 Vrms Max.
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 Vrms Min.
 Temperature Range: -55°C TO +125°C
 Durabiuty: 500 Cycles Min.

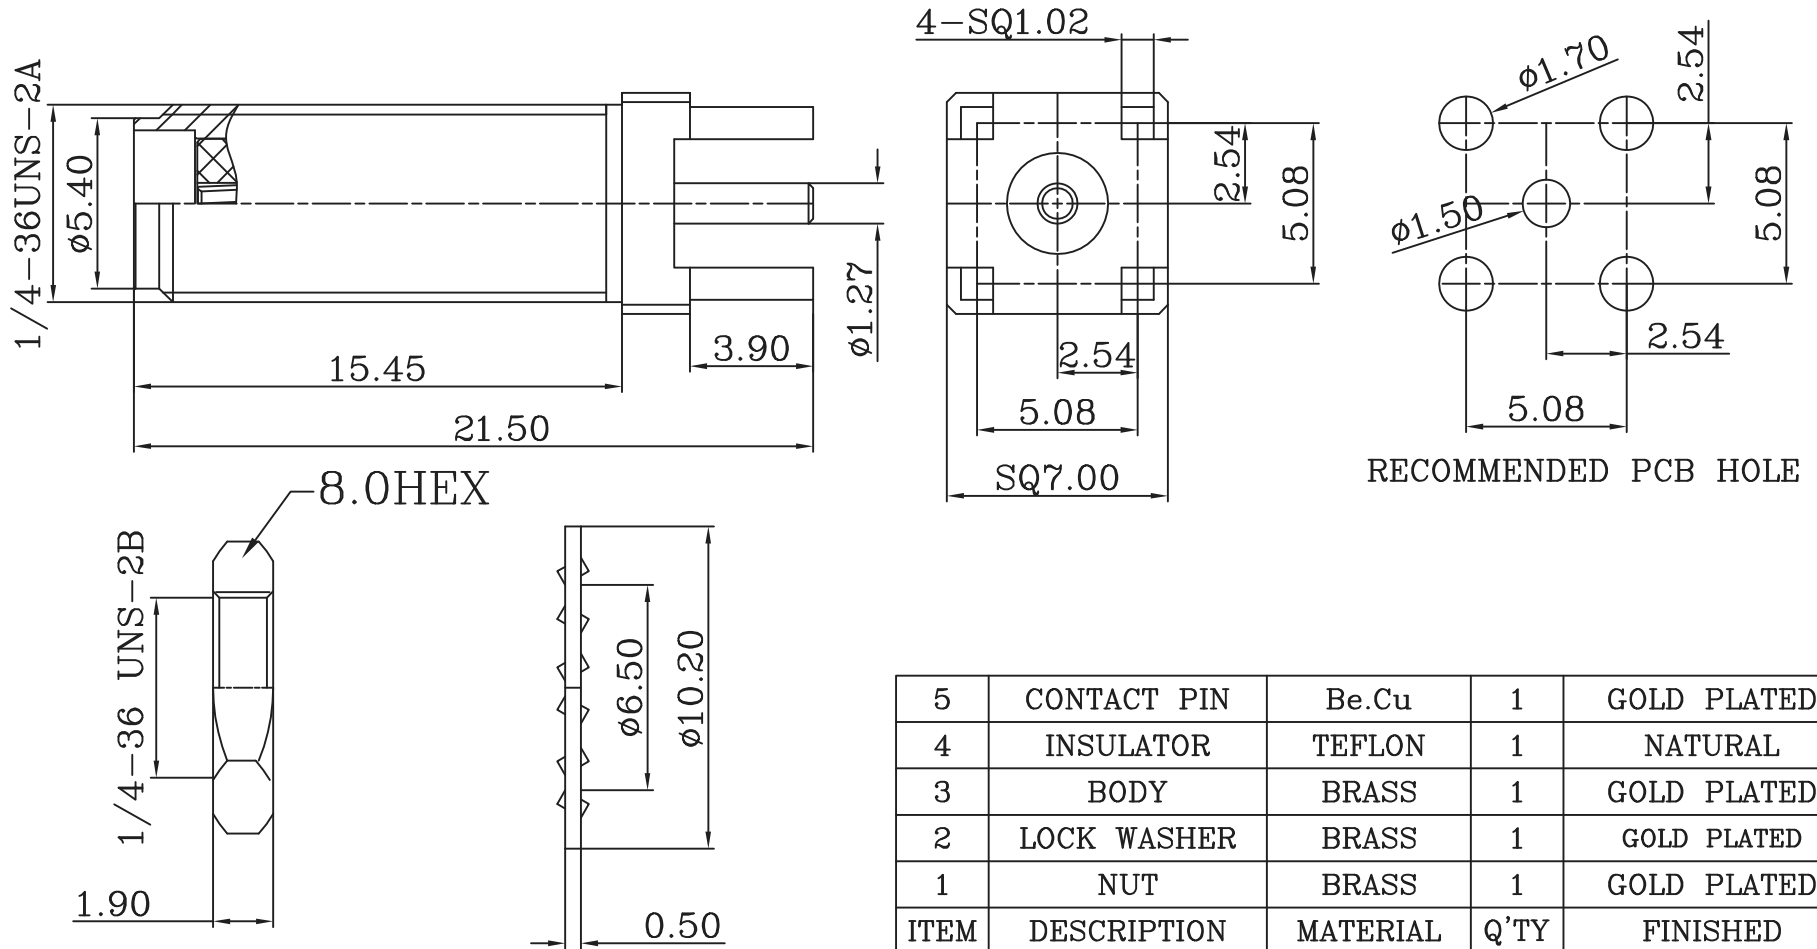

5	CONTACT PIN	Be.Cu	1	GOLD PLATED
4	INSULATOR	TEFLON	1	NATURAL
3	BODY	BRASS	1	GOLD PLATED
2	LOCK WASHER	BRASS	1	GOLD PLATED
1	NUT	BRASS	1	GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

0.5-15 = ±0.15
 15-30 = ±0.30
 30-120 = ±0.60
 >120 = ±1.00
 ANGLES
 ±5°

照片框

ORDER INFORMATION

SMA-JDL215PBNW-50-LF
 SERIES | | | | | LEADFREE
 | | | | | 50 OHM
 JACK | | | | | NUT
 DIP 180° | | | | | BACK
 LONG 21.5mm | | | | | PANEL
 WASHER

DESCRIPTION: SMA JACK EDGE CARD MOUNT PCB, STRAIGHT