

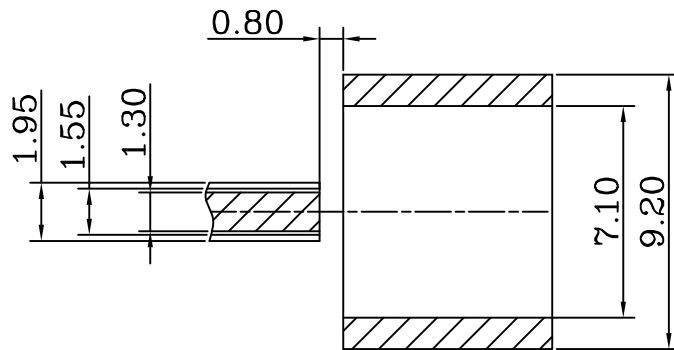


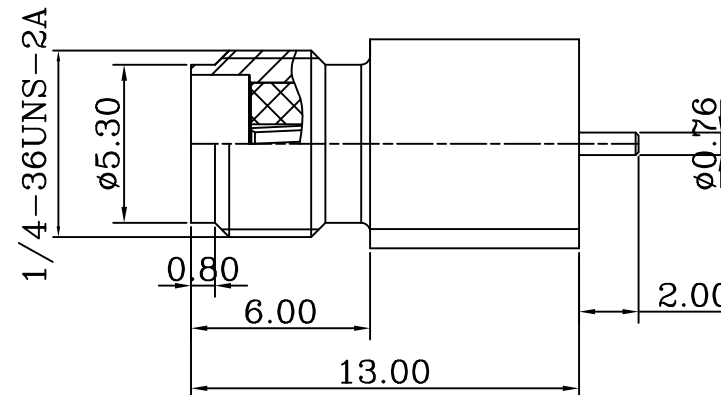

RECOMMENDED PCB LAYOUT

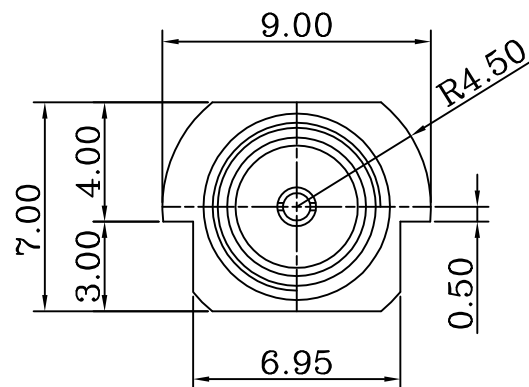

ELECTRICAL

IMPEDANCE: 50 OHM

FREQUENCY RANGE: 0 ~ 6 GHz

WORKING VOLTAGE: 500 Vrms Max.

DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms Min.

INSULATION RESISTANCE: > 5000 MEG OHM

ENVIRONMENTAL

TEMPERATURE RANGE: -65°C TO +165°C

3	CENTER PIN	Be.Cu	1	GOLD PLATED
2	INSULATOR	TEFLON	1	NATURAL
1	BODY	BRASS	1	GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

0.5-15 = ±0.20
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

照片框

ORDER INFORMATION

SMA-JW-50-LF
SERIES T LEADFREE
50 OHM
90° SMT
JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

SIZE A4

PPOJECTION

DESCRIPTION: