
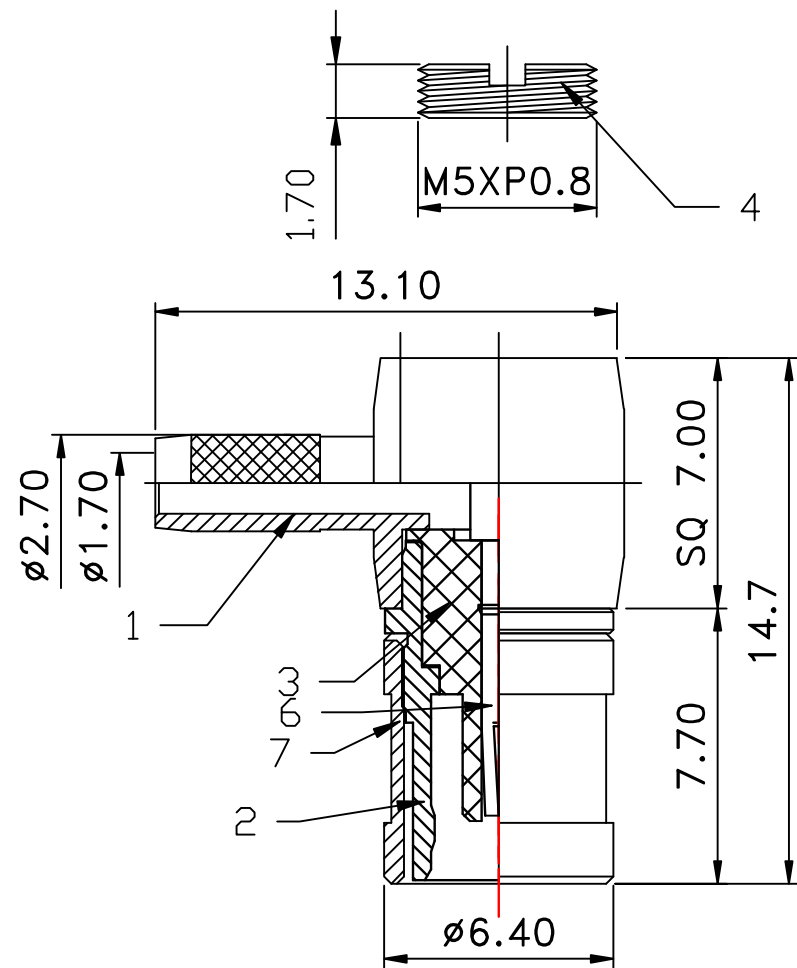


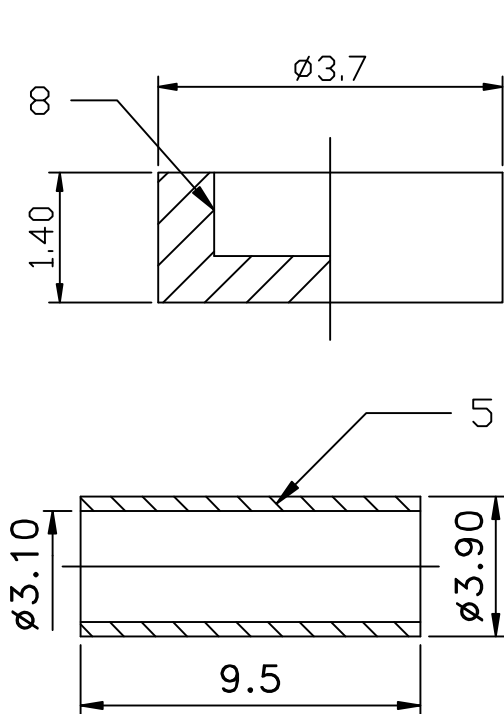

8	胶芯	T-09104T002-W	铁弗龙	白色	1
7	旋转头	B-09104B004-G	黄铜	金 AUF	1
6	PIN针	C-D9104B001-G	黄铜	金 AUF	1
5	铜管	F-D7801B004-G	黄铜	金 AUF	1
4	螺母	N-09104B001-G	黄铜	金 AUF	1
3	胶芯	T-09104T003-W	铁弗龙	白色	1
2	主体	B-D9104B003-G	黄铜	金 AUF	1
1	主体	B-D9104B001-G	黄铜	金 AUF	1
序号	名称	零件编号	材质	电镀/颜色	数量

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

315-1000 ±1.6

30-120 ±0.6

0.5-5 ±0.2

6-30 ±0.4

1000-2000 ±2.4

照片框

ORDER INFORMATION

SMB-PCR-179-LF
SERIES
LEADFREE
RG 179
90°
CRIMP
MALE

DESCRIPTION:

SMB

ELECTRICAL
IMPEDANCE
FREQUENCY

VSWR

STRAIGHT
RIGHT ANGLE

DIELECTRIC WITHSTANDING VOLTAGE
WORKING VOLTAGE

INSULATION RESISTANCE

CONTACT RESISTANCE
INNER CONDUCTOR
OUTER CONDUCTOR

- 75 OHM
- 0-4 GHz
- 1.3MAX
- 1.5MAX
- 750 VOLTS RMS MAX, AT SEA LEVEL
- 250 VOLTS RMS MAX, AT SEA LEVEL
- 1000 MEGOHMS MIN
- 6 MILLIOHMS MAX.
- 2.5 MILLIOHMS MAX.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION 

0.5-5	0.2
5-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4

照片框

ORDER INFORMATION

SMB-PCR-179-LF
SERIES
LEADFREE
RG 179
90°
CRIMP
MALE

DESCRIPTION: