


Specification:

1. Color: Black
2. Current rating: 16A
3. Voltage rating: 250V
4. Flammability: UL94 HB
5. IP rating: IP68
6. Temperature max.: 70°C
7. Temperature min.: -40°C

Cable preparation

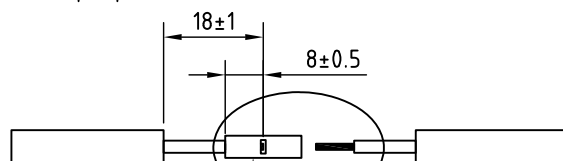

(6)Non-insulated
butt connectors

connect two conductors by non-insulated
butt connectors by solder or crimp method

6	Non-insulated butt connectors	Copper tube	2~4
5	Main body	PA	1
4	Contact partition	PA+GF	1
3	Seal	TPR	2
2	Pinch ring	PA	2
1	Nut	PA	2
Item	Description	Material	Q'TY

RoHS

TOLERANCE ± 0.5 UNLESS SPECIFIC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

PPOJECTION

照片框

ORDER INFORMATION

SMK25-CJ04-xx-LF

SERIES

LEADFREE

10:10~12 AWG

14:14~16 AWG

18:18~22 AWG

4 WAY
CABLE JOINT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: