


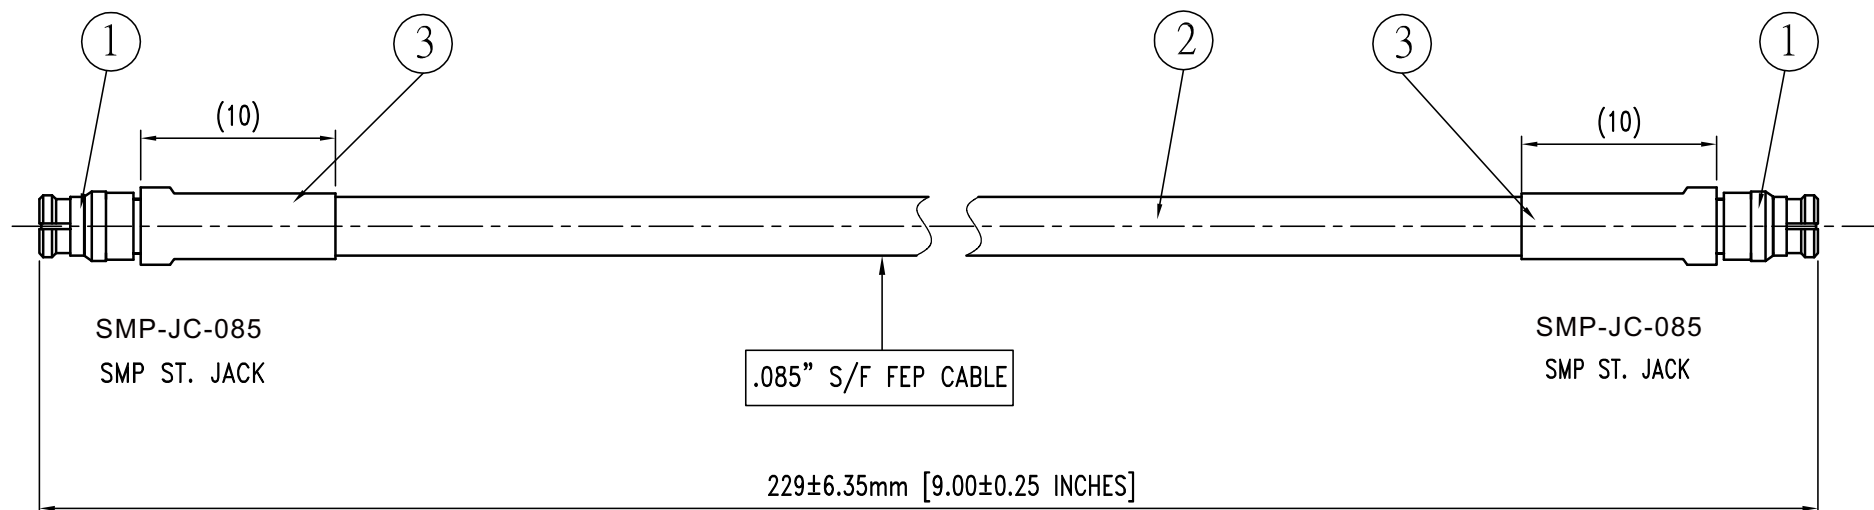

SPECIFICATIONS:

- 1.IMPEDANCE : 50 OHMS
- 2.Frequency : DC-20GHz
- 3.VSWR:1.25 Max. DC-6 GHz
1.50 Max. 6-12.5 GHz
1.75 Max. 12.5-20 GHz
- 4.Dielectric Withstanding Voltage: 500 Vrms Max.
- 5.Packaging: Single Pack

3	Heat Shrink/BLACK	2
2	CABLE .085" S/F FEP CABLE	1
1	SMP ST. JACK CONNECTOR SMP-JC-085	2
ITEM	DESCRIPTION	Q'TY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SMPX2-1S1S085-F9N-LF

SERIES

ST/ST

9 INCH

0.85 " S/F FEP CABLE

LEADFREE

FEMALE TO FEMALE

DESCRIPTION: SMP J. Au. +229+SMP J. Au.