

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"Ni,Full gold

Insulator(black): Glass filled thermoplastic polyester
UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega/\text{contact}$

Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V




Operaing voltage: 60VAC/DC

Mechanical:

Operaing temperatures: Gold Plsted:-55°C to+125°C

Tin plated:-40°C to+105°C

Soldering temperature: +260°C,10s max.

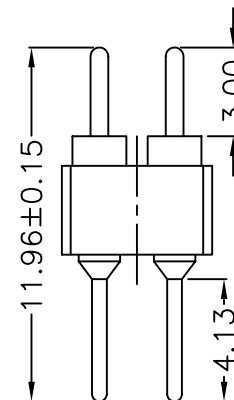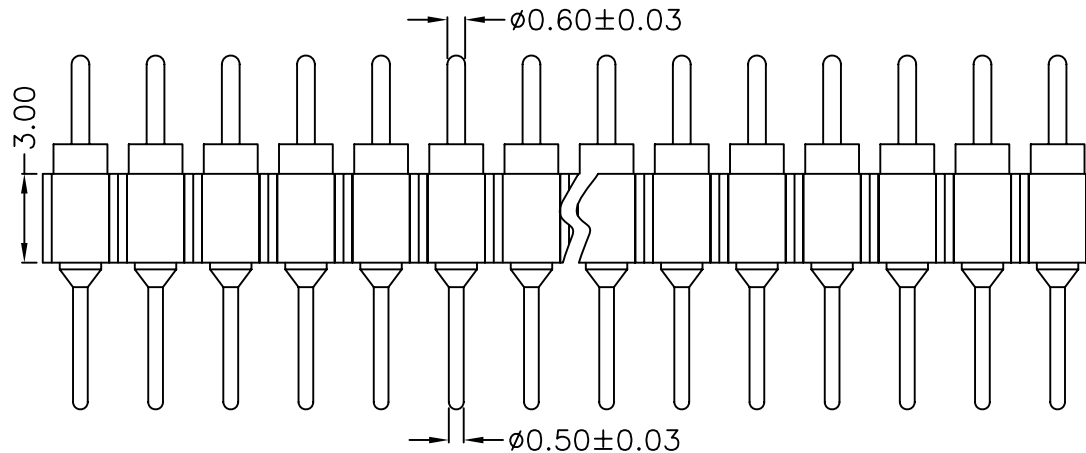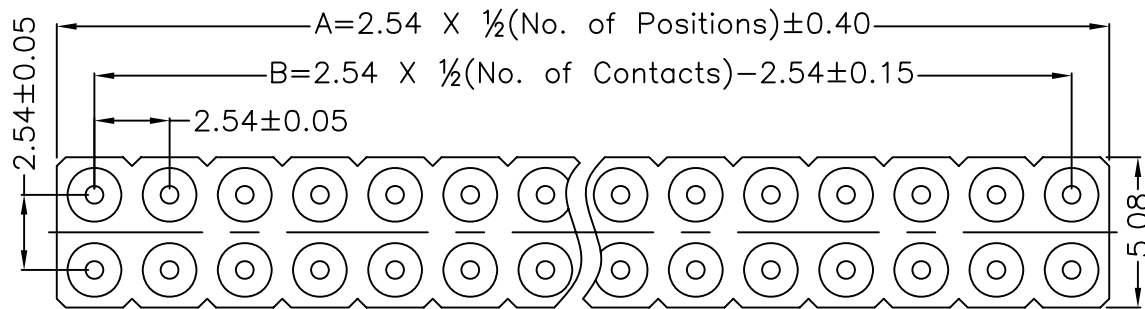

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.35

.X ± 0.20

.XX ± 0.15

.XXX ± 0.05

ANG $\pm 5^\circ$

PPOJECTION

照片框

ORDER INFORMATION

SP-D48x-2Xxx-LF
SERIES LEADFREE
2X02:04 WAY
2X40:80 WAY
DIP 180° G:GOLD PLATE
HIGH 4.83mm T:TIN PLATE

DESCRIPTION: DIP Spacing:2.54mm Pin Length 11.96mm