


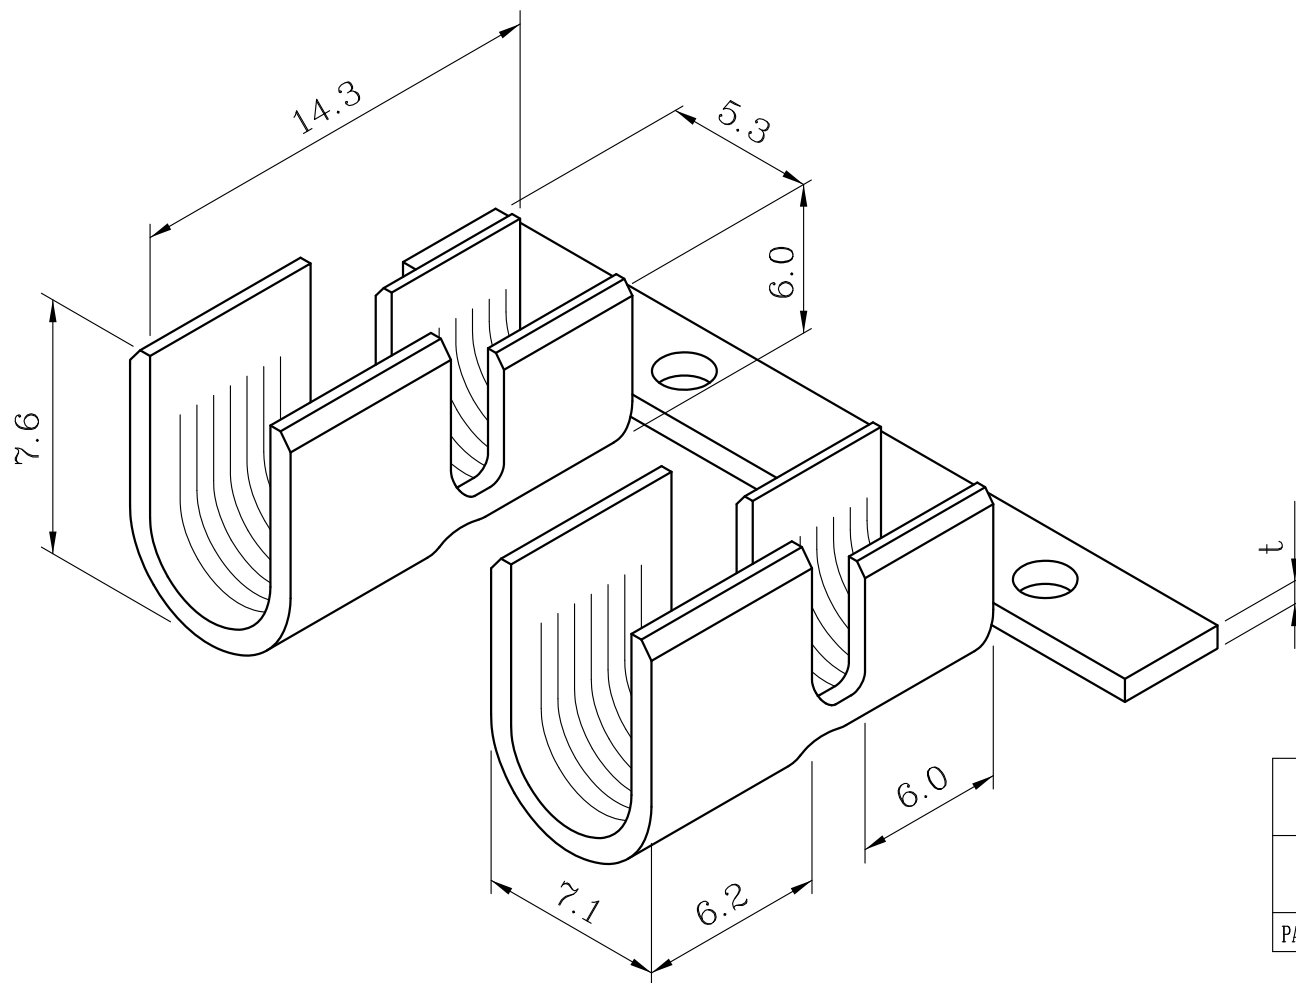

NOTE:

1. 表面處理  
鍍錫 40u" 以上

1.SURFACE TREATMENT:  
TIN PLATING  
THICKNESS MORE THAN 40u"

|              |            |       |            |                    |
|--------------|------------|-------|------------|--------------------|
| 2500         | 12~10      | 0.5   | SPT-14T-10 | 鍍 錫<br>TIN PLATING |
|              |            |       | SPT-14B-10 | 素材<br>NONE         |
| 2000         | 14~12      | 0.6   | SPT-14T-12 | 鍍 錫<br>TIN PLATING |
|              |            |       | SPT-14B-12 | 素材<br>NONE         |
| PACKING Q'TY | WIRE RANGE | DIM t | PART NO.   | FINISH             |

|                  |          |                           |                                   |                            |             |
|------------------|----------|---------------------------|-----------------------------------|----------------------------|-------------|
| 材質<br>MATERIAL   | JIS2680H | 一般公差<br>GENERAL TOLERANCE | X :±0.5<br>X X :±0.3<br>X XX:±0.1 | X XXX :±0.05<br>ANGLES ±3° | 比例<br>SCALE |
| 料 厚<br>THICKNESS |          | 包裝數量<br>PACKING Q'TY      | PCS/R                             | 適用電線<br>WIRE RANGE         |             |
| 間 距<br>PITCH     | 18.2     | 對 手 件<br>MATING PART      | TAB:                              |                            |             |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

SPT-14x-xx-LF

SERIES

LEADFREE

10:10~12AWG  
12:12~14AWG

LONG 14.0mm

T:TIN  
B:BRASS

DESCRIPTION: