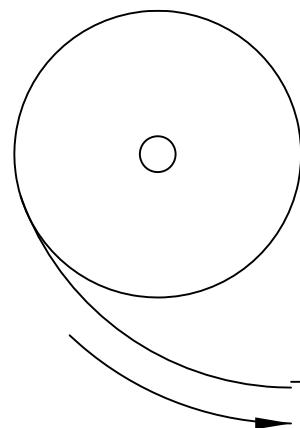
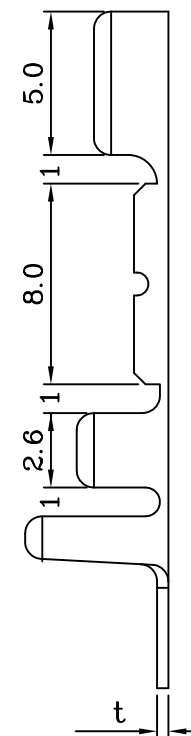
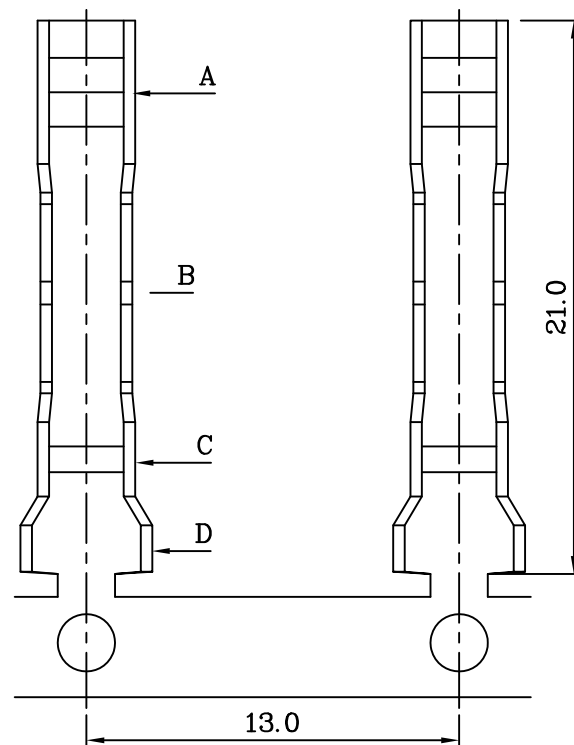




NOTE:

1. 表面處理
鍍錫 40u" 以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 40u"

材 質 JIS2680H
MATERIAL

包裝數量 4000
PACKING Q'TY PCS/R

20~16	0.6
20~14	0.4
WIRE RANGE	DIM t

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SPT-21x-xx-LF

SERIES

LEADFREE

14:14~20AWG
16:16~20AWG

LONG 21.0mm

T:TIN
B:BRASS

DESCRIPTION: