


Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass
 Contact clip(4/6 finger): Beryllium copper(C17200)
 Accepted pin: $\varnothing 0.38$ to 0.56mm
 Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
 Mechanical life: min500 cycles
 Rated current: 3A
 Contact resistance: max $10\text{m}\Omega$
 Dielectric resistance: Min $1000\text{M}\Omega$
 Operating temperature: -40°C to $+105^{\circ}\text{C}$
 Soldering temperature: 260°C , 10s max

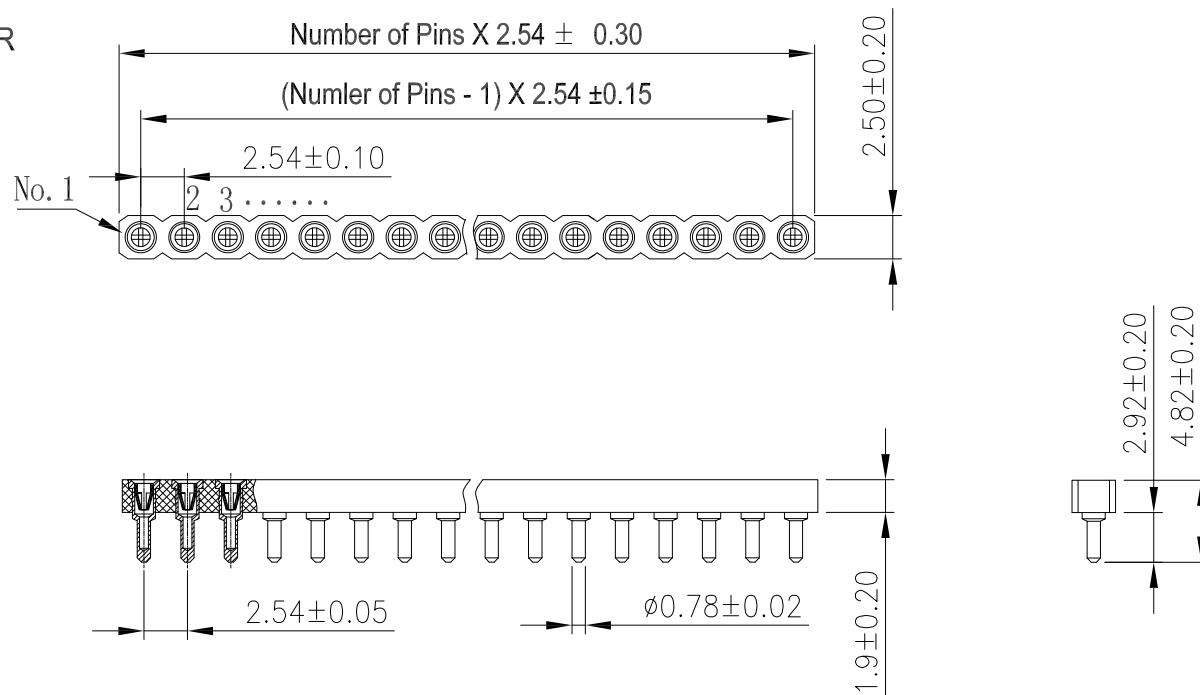

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, \pm
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG \pm

照片框

ORDER INFORMATION

SS-D25-1Xxx-LF

SERIES | LEADFREE
 1X02:02WAY
 1X40:40WAY
 HIGH 2.54mm
 DIP 180°

DESCRIPTION: 2.54MM 180度DIP单排圆排母H1.9MM L=4.82MM CONN