

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F

E

D


C

B

A

MATERIAL & FINISH

- * Contact: Beryllium Copper (BeCu)
- * Sleeve: Brass
 - Plating: G=Gold Plated
 - T=Tin Plated
- * Insulator: IC Socket=PPS
- * Insertion Standard Force: Average 300 GR
- * Extraction Standard Test: Average 60 GR
- * Resist to Soldering Heat: Max. 230°C, 10 Sec.
- * Current Rating: 1A
- * Operating Humidity Range: Annual mean 75%
- * Contact Resistance : 10 Milliohm
- * Insulator Resistance : 5000 Mege Ohm at 500 VDC
- * Dielectric Strength : 1000 VRMS Min
- * Rated Voltage : 100 VRMS / 150VDC
- * Temperature: - 55°C TO + 240°C

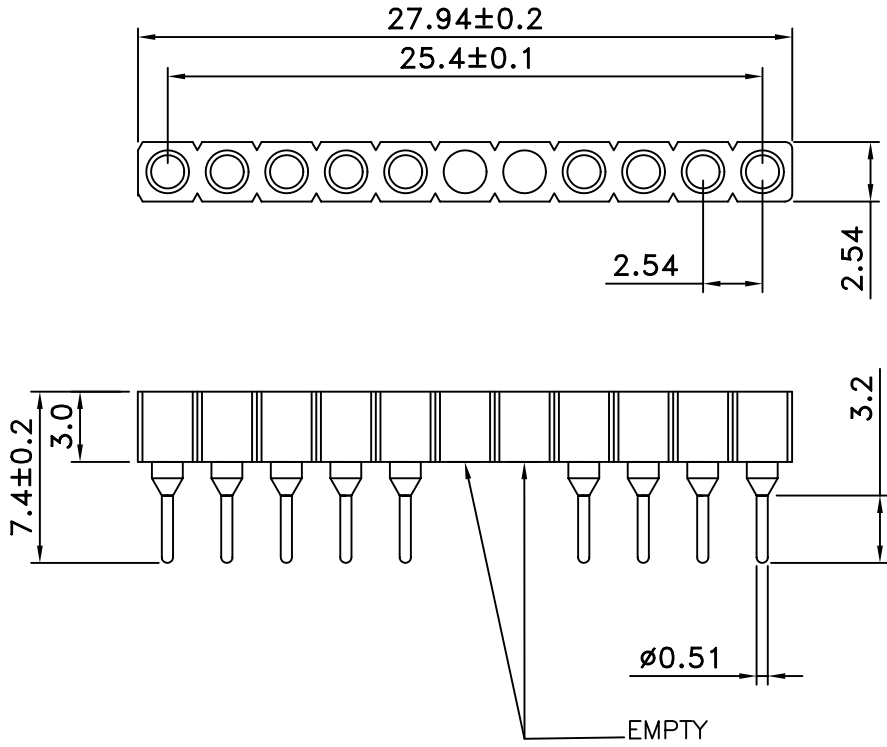

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. SS-DEM2-1X11

DWG NO. SS-DEM2-1X11

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

X ± 0.20
XX ± 0.15
XXX
AWG

DESCRIPTION:	2.54mm SIP SOCKET			
	AREA	REVISIONS	HK	DATE