
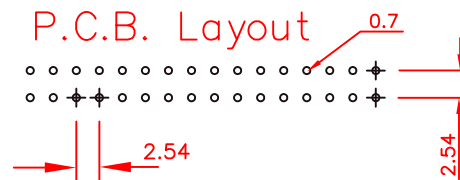



Technical Data

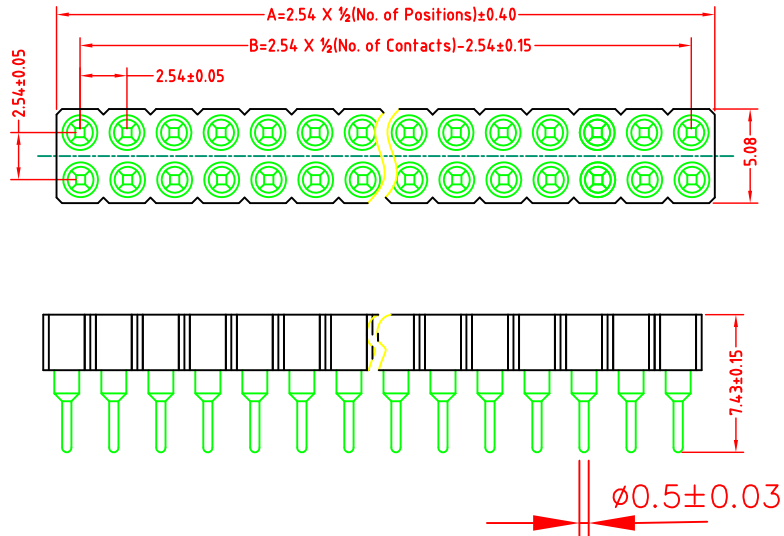

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Clip(cotact 4 finr): Phosphor/Bronze heat treated

Plating(outer sleeve):

Tin plated:2um/80u" Ni, 5um/200u" Sn

Gold Plated:2um/80u" Ni,Full gold

Insulator(black): Glass filled thermoplastic polyester
UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V

Operaing voltage: 60VAC/DC

Mechanical:

Operaing temperatures: Gold Plsted:-55°C to+125°C

Tin plated:-40°C to+105°C

Soldering temperature: +260°C,10s max.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 $.X \pm 0.10$
 $.XX \pm 0.01$
 $.XXX \pm 0.005$
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SS-DPHB-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 PHOSPHOR BRONZE
 DIP 180°

DESCRIPTION: