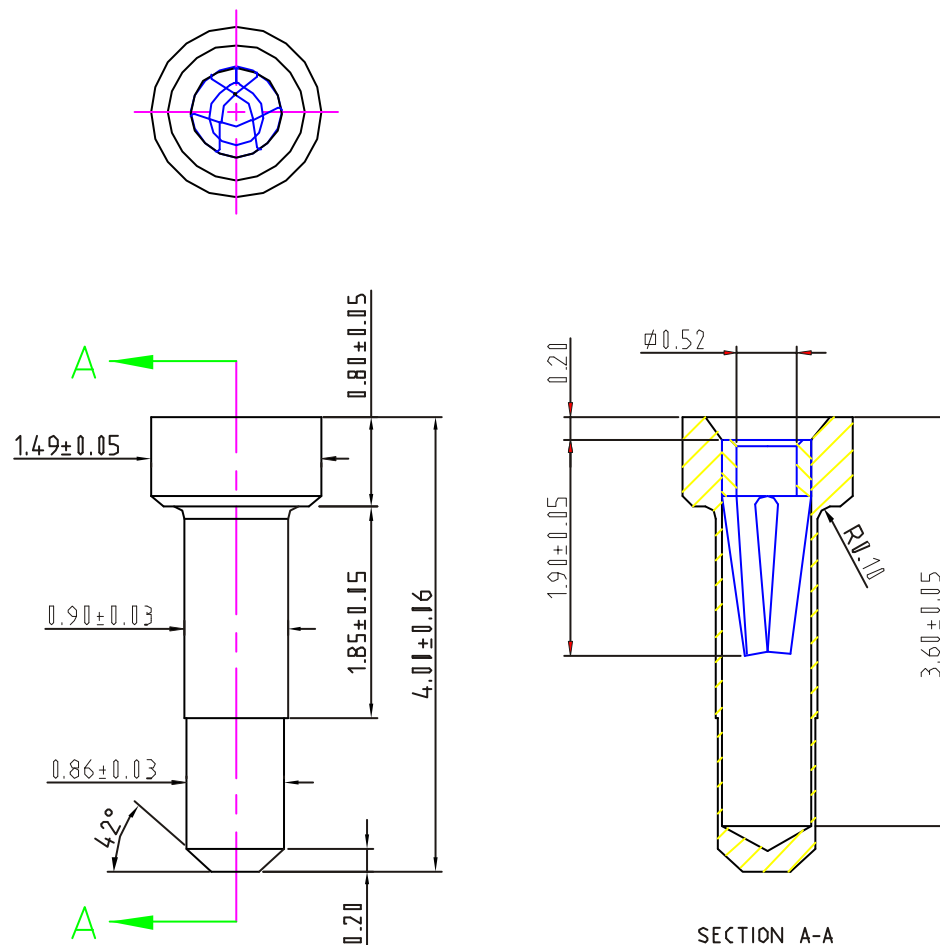


Material

- Pin (outer sleeve) : Brass, machined, CuZn38pB2
- Clip (contact 3 finger) : PhBz, heat treated
- Plating (outer sleeve) : Tin plated; 2ugm/80ug"nickel, 5ugm/200ug"tin
Gold plated; 2ugm/80ug"nickel, Full gold flash
- Plating (contact) : 2ugm/80ug"nickel, gold or Tin plating (See TABLE 4)
- Electrical
- Current rating : 3Amps/contact max.
- Contact resistance : <4mΩ/contact
- Mechanical
- Mechanical life : min. 2000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SS-DXT-0.4-LF
SERIES | LEADFREE
DIA 0.4mm
WITHOUT TAIL
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: