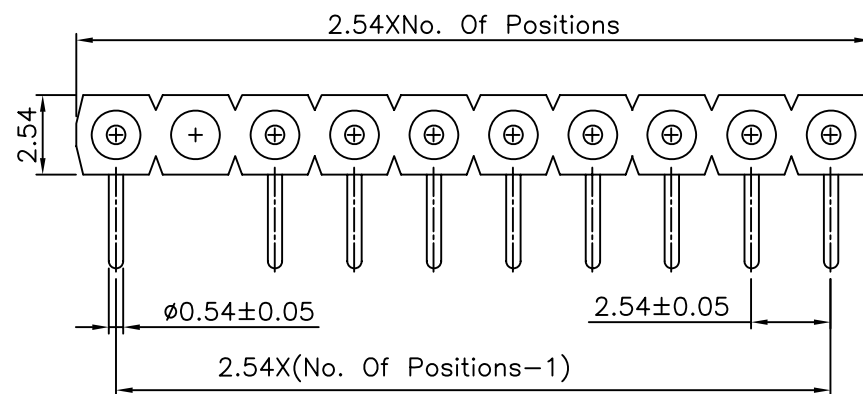


P.C.B Layout

Specifications:

Current rating:3.0A AC/DC

Voltage rating:100V AC/DC

Contact resistance:10m ohm. max.

Insulation resistance:5000M ohm. Min.

Withstanding voltage:1000V AC for one minute

Operating temperature rating:-40°C to + 105°C

Material and Finish:

Insulator:High Temp. Plastic (UL94V-0)

Contact:Beryllium Copper

Plating:Selective Gold Plated Plated over Nickel

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ± 5°

ORDER INFORMATION

SS-R-1XxxE2-LF
SERIES LEADFREE
EMPTY #2
1X02:02 WAY
1X40:40 WAY
DIP 90°

DESCRIPTION: 2.54mm Sip Socket R/A Single Row