
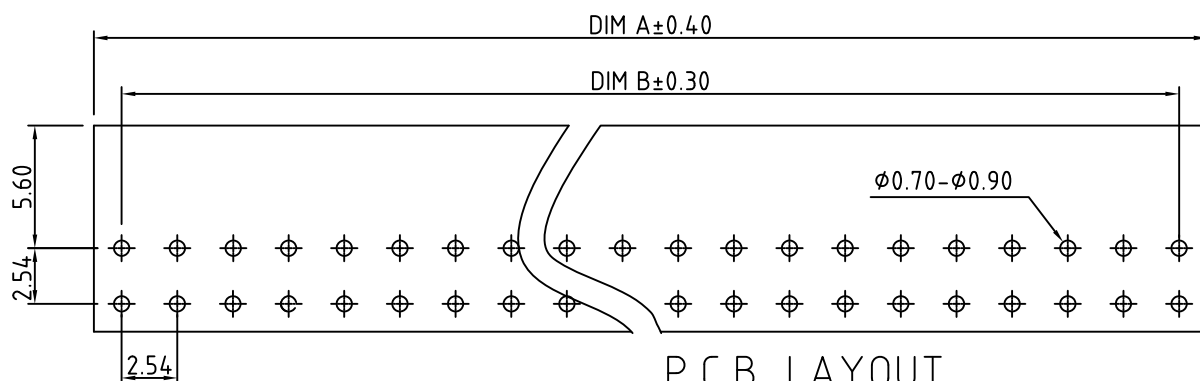
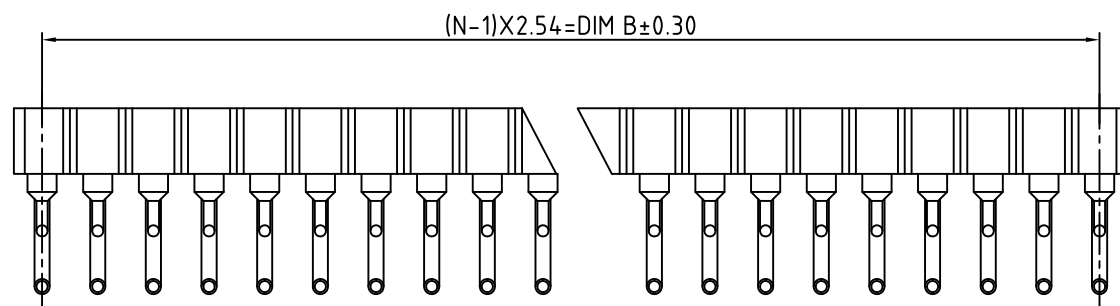
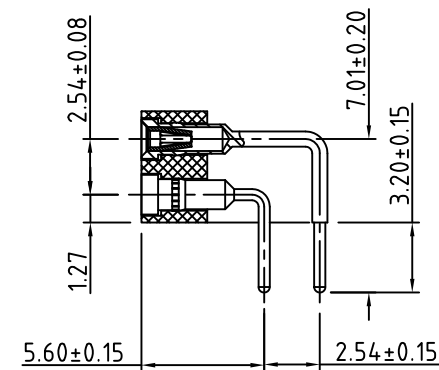


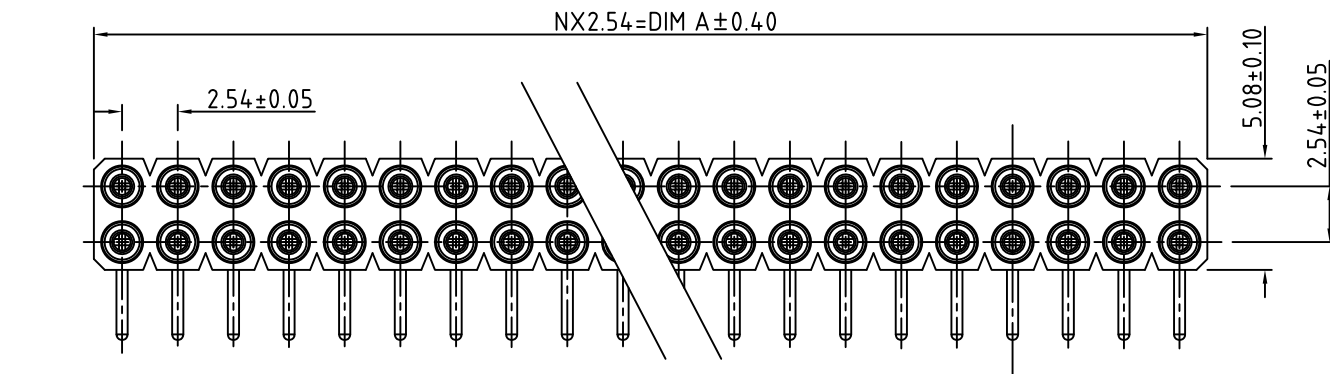

Technical Data:

Material:

- Pin (outer sieveve) : Brass,machined, CuZn38Pb2
- Clip(contact 4 finger):Beryllium copper,heat treated
- Plating(outer sleeve) : Tin plated:2μm/80μ"nickel,5μm/200μ"Tin
Gold plated:2μm/80μ"nickel,Full gold
- Plating(contact):2μm/80μ"nickel,gold or Tin plating
- Insulator body(housing) : Glass filled polyester (UL94V-0)

Electrical

- Current rating : 3 Amps/contact max.
- Contact resistance : <4mΩ/contact
- Insulation resistance: >10000MΩ at 500VAC
- Rated voltage :100 VRMS/150Vdc

Mechanical

- Operating temperature: Gold plated:-55°C to +125°C (continuous) Tin plated:-40°C to +105°C
- Average insertion force : <250g
- with steel pin of Ø0.43mm/0.017"
- Average withdrawal :>50g
- force with steel pin of Ø0.43mm/0.017"
- Mechanical life : min.200
- Soldering temperture : +260°C,10s max.

Ordering information:

ORDER INFORMATION

SS-R-2Xxx-LF
 SERIES | LEADFREE
 2X02:04 WAY
 2X40:80 WAY
 DIP 90°

DESCRIPTION: 2.54mm Sip Socket R/A Single Row

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ± 0.05
 ANG ± 5°

PPOJECTION

照片框

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com