

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. MATERIAL OF COMPONENTS :  
 HOUSING .....HIGH TEMPERATURE PLASTIC BLACK  
 30% GLASS FIBER ,UL94 V-0..  
 CONTACT .....COPPER ALLOY  
 SHIELD .....COPPER ALLOY
3. ELECTRICAL CHARACTERIST :  
 (1) OPERATING TEMPERATURE : 105(MAX.)°C  
 (2) CURRENT RATING :  
 POWER CONTACT : 30A 600VAC(PER PIN 48A)  
 SIGNAL CONTACT : 3.0A 600VAC  
 (3) INSULATION RESISTANCE :  
 POWER CONTACT : 10000 MEGOHMS MAX.  
 (500 VOLT DIRECT CURRENT)  
 SIGNAL CONTACT : 500 MEGOHMS MAX.  
 (500 VOLT DIRECT CURRENT)

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

ORDER INFORMATION

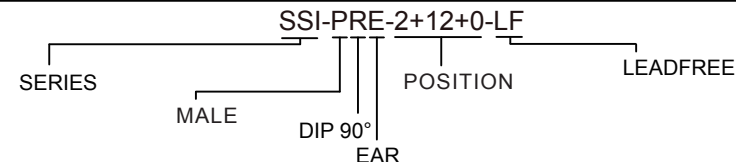

DESCRIPTION: HIGH POWER CONNECTOR 2DC12S MALE