

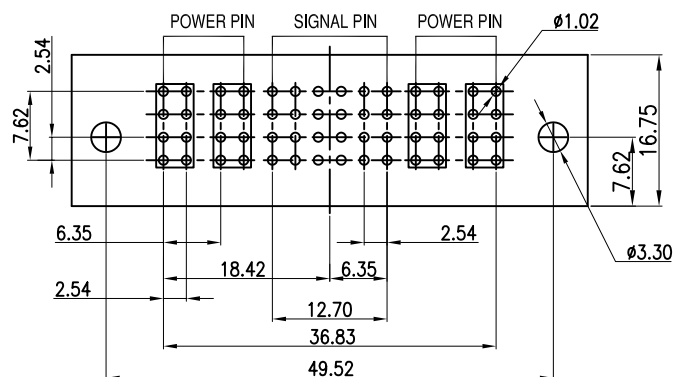
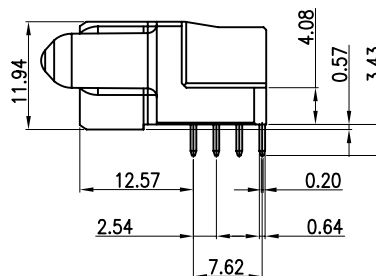
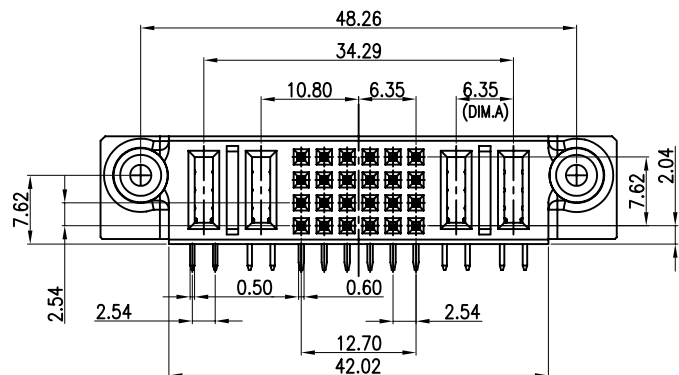



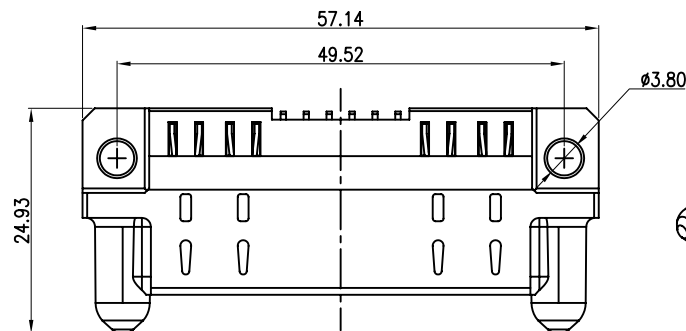

RECOMMEND PCB LAYOUT

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. MATERIAL OF COMPONENTS :
HOUSINGHIGH TEMPERATURE PLASTIC BLACK
SPACERHIGH TEMPERATURE PLASTIC BLACK
CONTACTCOPPER ALLOY
3. ELECTRICAL CHARACTERIST :
(1) OPERATING TEMPERATURE : 105(MAX.)°C
(2) CURRENT RATING :
POWER CONTACT : 30A 600VAC
SIGNAL CONTACT : 0.5A 600VAC
(3) INSULATION RESISTANCE :
POWER CONTACT : 1000 MΩ
SIGNAL CONTACT : 500 MΩ

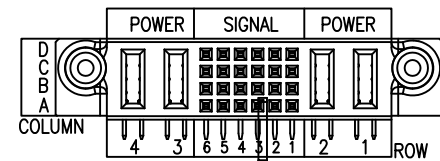

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SSI-SRE-2+24+2-LF
SERIES LEADFREE
2+24+2 WAY
EAR
DIP 90°
FEMALE

DESCRIPTION: HIGH POWER FEMALE CONNECTOR (PITCH 6.35mm)