


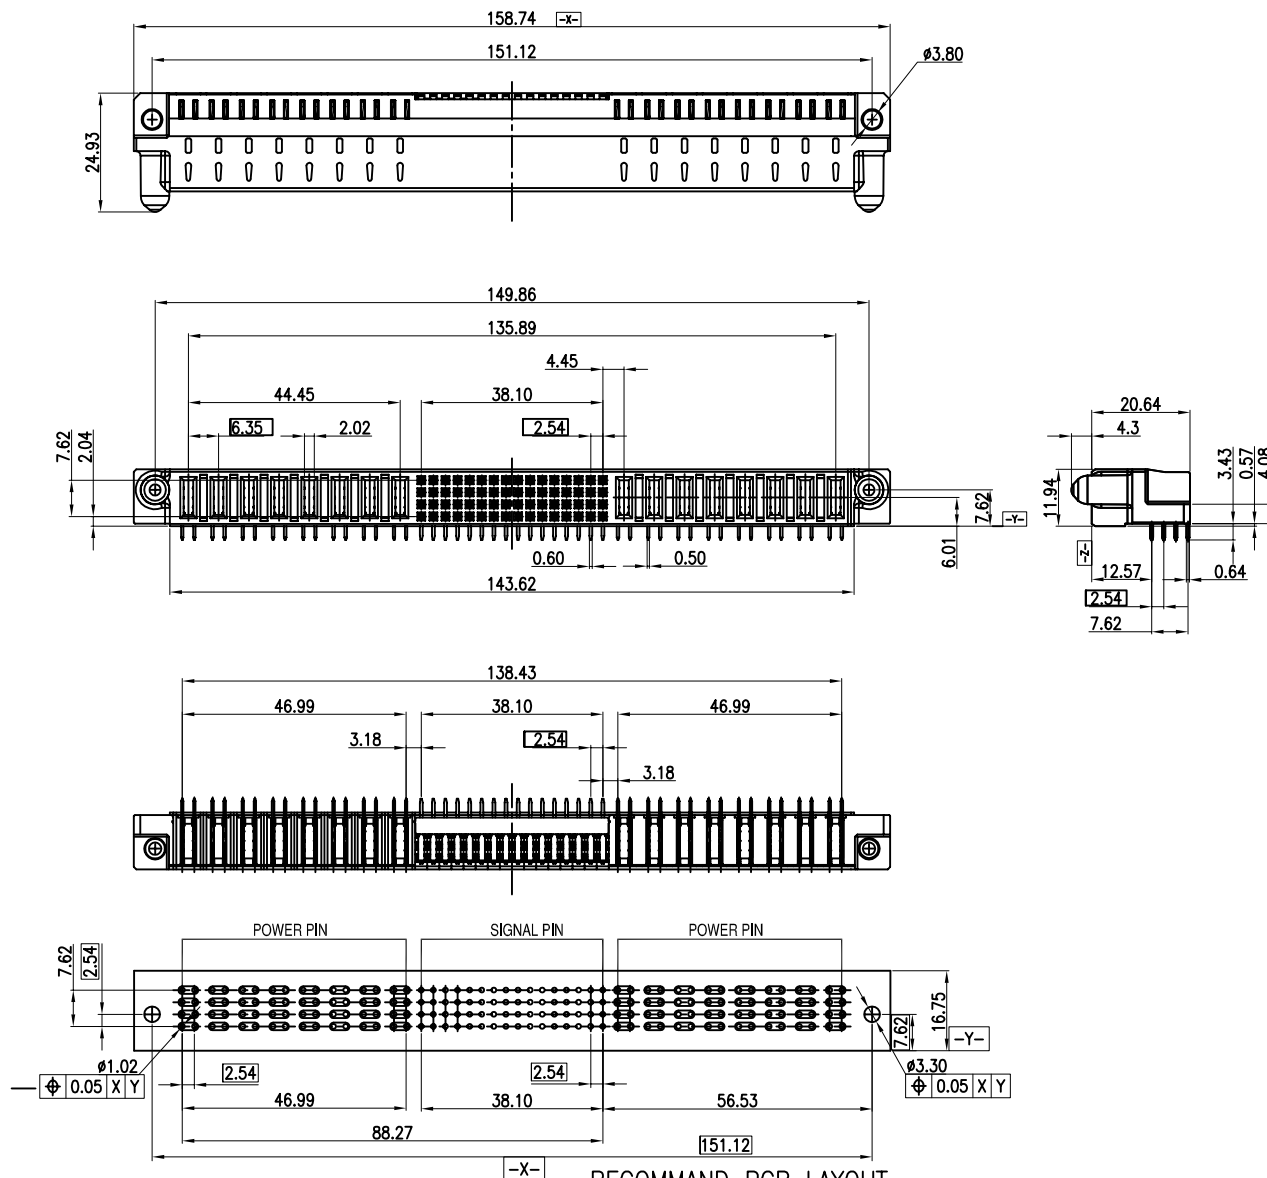

NOTES:

- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
- MATERIAL OF COMPONENTS :
 - HOUSINGHIGH TEMPERATURE PLASTIC BLACK 30% GLASS FIBER ,UL94 V-0..
 - SPACEHIGH TEMPERATURE PLASTIC BLACK 30% GLASS FIBER ,UL94 V-0..
 - CONTACTCOPPER ALLOY
 - SHIELDCOPPER ALLOY
- ELECTRICAL CHARACTERIST :
 - OPERATING TEMPERATURE : 105(MAX.)°C
 - CURRENT RATING :
 - POWER CONTACT : 30A 600VAC(PER PIN 48A)
 - SIGNAL CONTACT : 0.5A 600VAC
 - INSULATION RESISTANCE :
 - POWER CONTACT : 1000 MEGOHMS (500 VOLT DIRECT CURRENT)
 - SIGNAL CONTACT : 500 MEGOHMS (500 VOLT DIRECT CURRENT)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SSI-SRE-8+64+8-LF
SERIES | EAR | LEADFREE
8+64+8 PIN
DIP 90°
FEMALE

DESCRIPTION: HIGH POWER 8P64S8P FEMALE CONNECTOR