


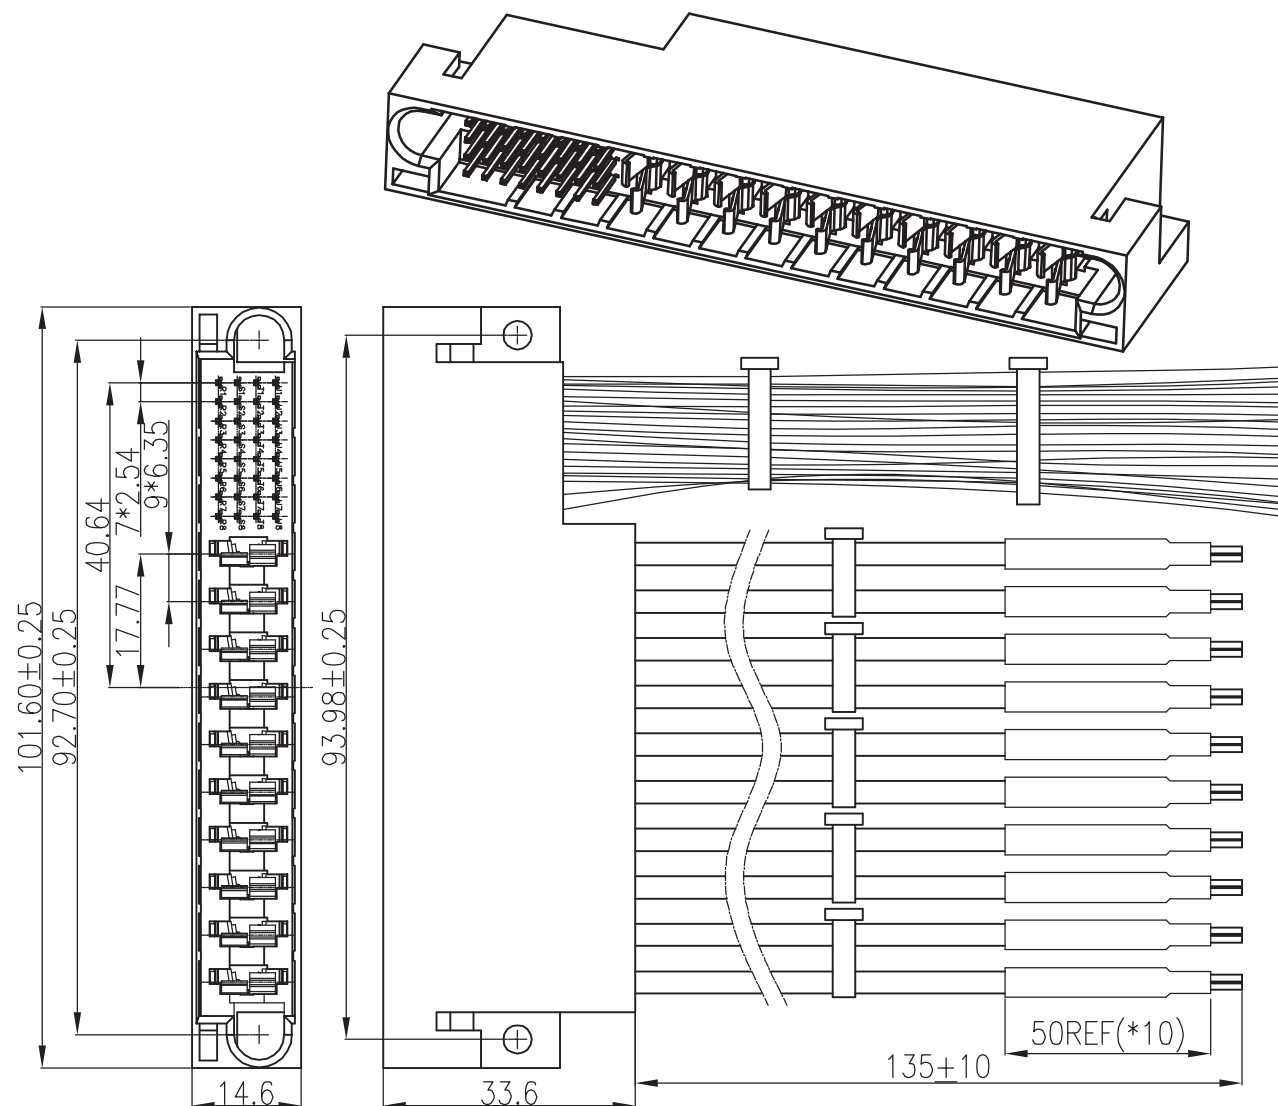

1. MATERIAL :
INSULATOR : GLASS FILLED POLYESTER, UL 94 V-0 RATED OR OTHER EQUIVALENT RESINS.
TERMINAL : COPPER ALLOY
2. FINISH: GOLD PLATING IN THE CONTACT AREA AND SELECTIVE PLATING IN THE SOLDERTAIL AREA WITH 50u"(min.) NICKEL UNDERPLATING OVERALL.
3. ELECTRICAL CHARACTERISTIC :
 - (1) Operating Temperature :
105(max.) Degree C
 - (2) Current Rating :
Power Contact: 30A 600Vac/dc
Signal Contact: 1A 600Vac/dc
 - (3) Insulation Resistance :
Power Contact: 1000 megohms(500 volt direct current)
Signal Contact: 500 megohms(500 volt direct current)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SSIX1-003210-M13C5-LF

SERIES

135mm

LEADFREE

MALE

32+10 PIN

DESCRIPTION: GH POWER CONNECTOR RECEPTACLE 接線