
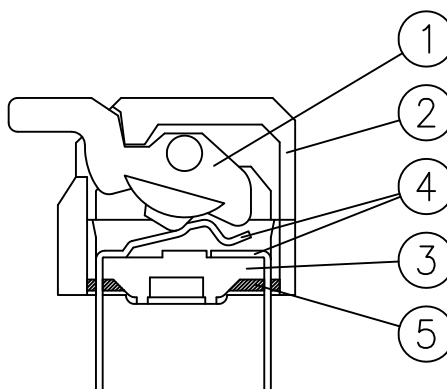
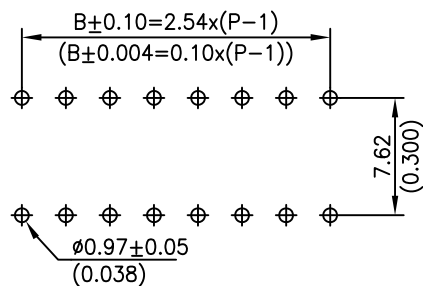
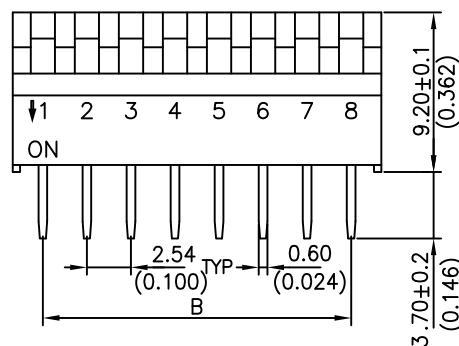
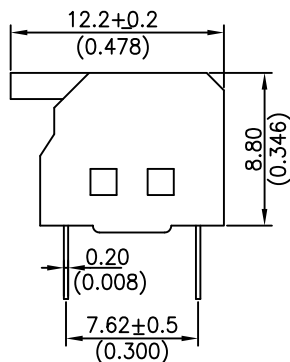



DIMENSION:(UNIT:mm/inches)

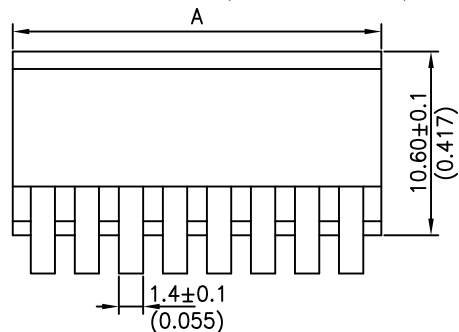

CONSTRUCTION

No.ofPOS	DIM.A	DIM.B
01	4.00(0.157)	
02	6.26(0.246)	2.54(0.100)
03	9.06(0.357)	5.08(0.200)
04	11.34(0.446)	7.62(0.300)
05	13.88(0.546)	10.16(0.400)
06	16.42(0.646)	12.70(0.500)
08	21.50(0.846)	17.78(0.700)
10	26.58(1.046)	22.86(0.900)
12	31.66(1.246)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

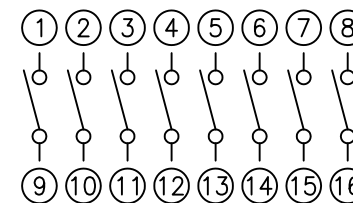

CIRCUIT DIAGRAM

自由公差		
区分	类别	公差
0	< 0.5	±0.10
0.50	< 5	±0.15
5.0	< 10	±0.20
10.0	< 20	±0.30
20.0	< 50	±0.40
未标注R角		R0.3
未标注角底公差		±2°

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SW-Pcc-xx-LF
SERIES T LEADFREE
01~12 WAY
RD:RED
BL:BLUE
BK:BLACK
PIANO

DESCRIPTION: DIP SWITCH