
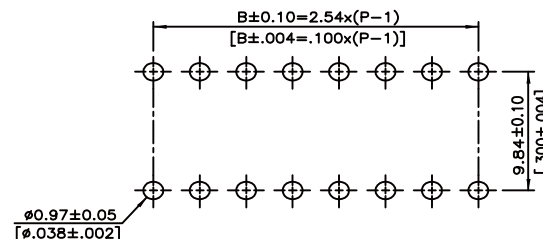




**NOTE:** 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.

2. GENERAL TOLERANCES: 10mm OVER -  $\pm 0.20$ mm.  
10mm BELOW -  $\pm 0.10$ mm.


3. SW-SC04 -01~03 ARE WITHOUT "DIP" PRINTING.

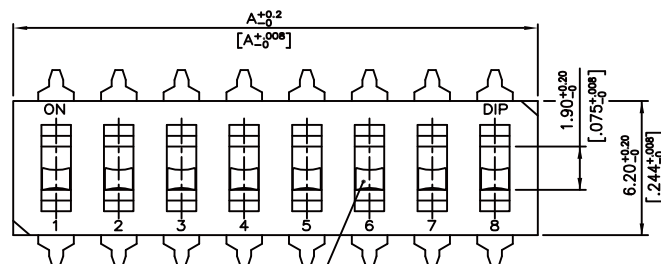

P.C.B. LAYOUT

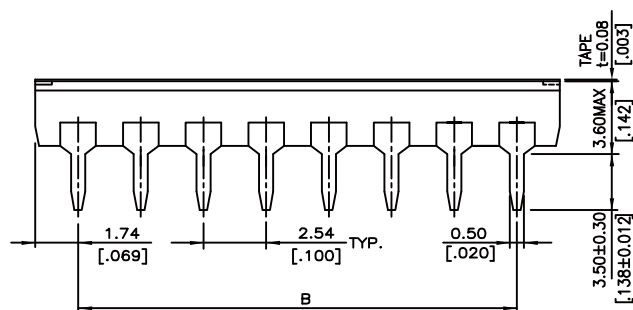


SW-SC04X-xx



SW-SC04-xx

| 12          | 31.42[1.237] | 27.94[1.100] |
|-------------|--------------|--------------|
| 10          | 26.34[1.037] | 22.86[.900]  |
| 9           | 23.80[.937]  | 20.32[.800]  |
| 8           | 21.26[.837]  | 17.78[.700]  |
| 7           | 18.72[.737]  | 15.24[.600]  |
| 6           | 16.18[.637]  | 12.70[.500]  |
| 5           | 13.64[.537]  | 10.16[.400]  |
| 4           | 11.10[.437]  | 7.62[.300]   |
| 3           | 8.56[.337]   | 5.08[.200]   |
| 2           | 6.02[.237]   | 2.54[.100]   |
| 1           | 3.48[.137]   | —            |
| NO. OF POS. | DIM. A       | DIM. B       |

SCHEMATIC(TYP.)



(1,2,3,4,5,6,7,8,9,10,12,POS AVAIL)

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

SW-SC04x-xx-LF

SERIES

SLIDE

IC TYPE

LEADFREE

01~12WAY

BLANK:RAISED/ACTUATOR

X:RECESSED/ACTUATOR

9.84mm

DESCRIPTION: