

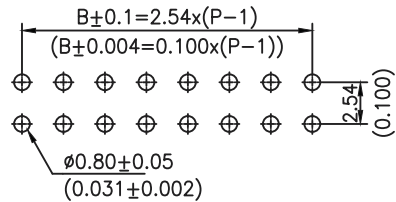
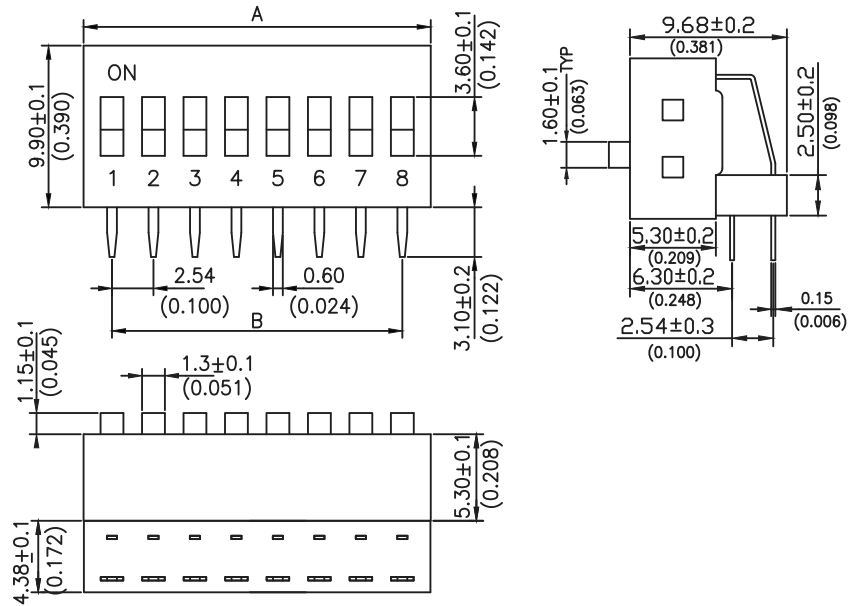


DIMENSION:(UNIT:mm/inches)

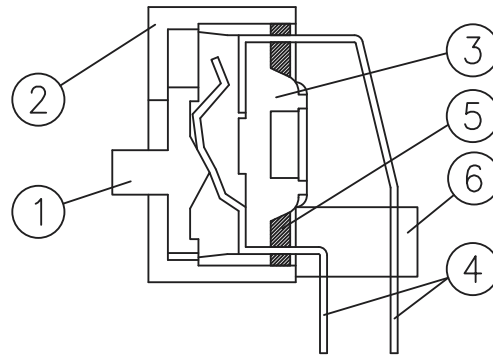

P.C.B. LAYOUT



PART NO.	NO.OF POS	DIM.A	DIM.B
SW-SRBcc-02	02	6.08(0.239)	2.54(0.100)
SW-SRBcc-03	03	8.92(0.351)	5.08(0.200)
SW-SRBcc-04	04	11.16(0.439)	7.62(0.300)
SW-SRBcc-06	06	16.24(0.639)	12.70(0.500)
SW-SRBcc-08	08	21.32(0.839)	17.78(0.700)
SW-SRBcc-10	10	26.40(1.039)	22.86(0.900)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK
6	ACCESSORY	UL94V-0 PBT THERMOPLASTIC	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SW-SRBcc-xx-LF
SERIES | | | | LEADFREE
02~10 WAY
BL:BLUE
BK:BLACK
RD:RED
BRACKET
DIP 90°
FEMALE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: