







SCHMATIC(TYP.)

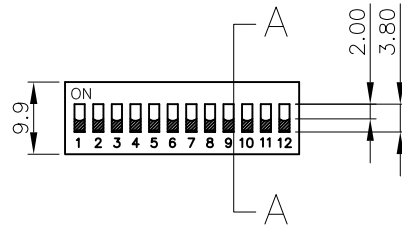

P.C.B. Layout



”A”

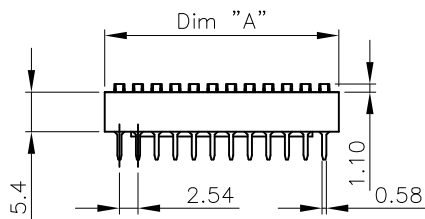

Contact rating: 24V DC, 5mA Switched
 Contact Resistance: 50mohms max
 100mohms max after life test

Dielectric strenght: 500DV/1minute
 Electonstatic Capacity: 5pF max.
 Insulation Resistance: 100Mohms min.at 250VDC.
 Operating Force: 800g max.
 Temperature range: -40° to +85°

Material:
 Housing : Glass Filled polyester, PBT, UL94-V0
 Contacts: Phosphor Bronze, gold plated.
 Durability: 2000 switch operation cycles.

NO.	Dim "A"	Dim "B"
1	4	N / A
2	6.54	2.54
3	9.08	5.08
4	11.62	7.62
5	14.16	10.16
6	16.70	12.70
7	19.24	15.24
8	21.78	17.78
9	24.32	20.32
10	26.86	22.86
11	29.40	25.40
12	31.94	27.94

POSITION S: SLIDE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X, ± 0.25
 .X ± 0.10
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

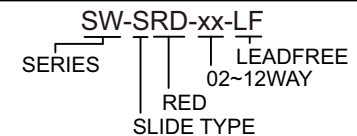

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: