

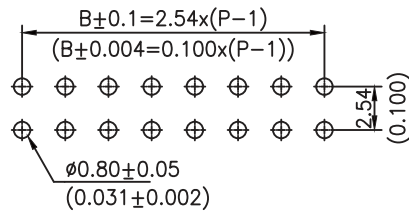
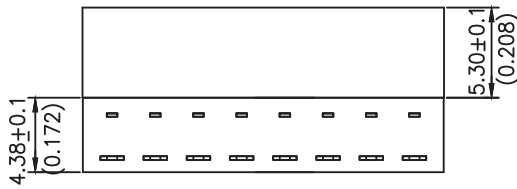
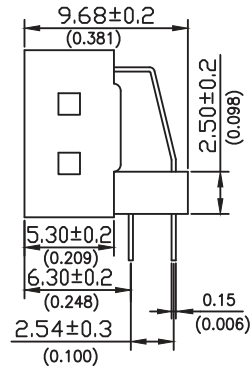



DIMENSION:(UNIT:mm/inches)

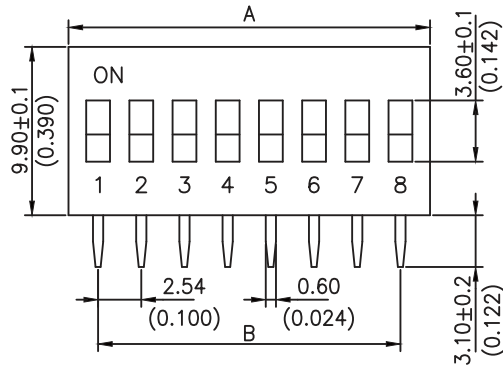

P.C.B. LAYOUT



CIRCUIT DIAGRAM

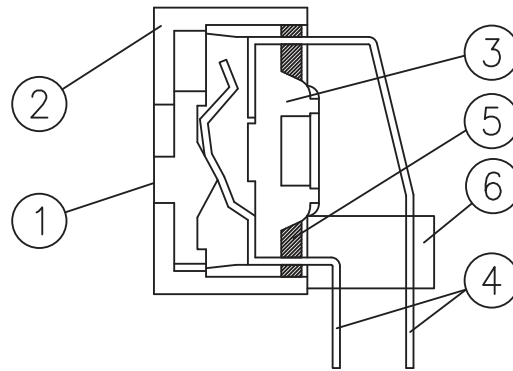

CONSTRUCTION

PART NO.	NO.OF POS	DIM.A	DIM.B
SW-SRXBcc-02	02	6.08(0.239)	2.54(0.100)
SW-SRXBcc-03	03	8.92(0.351)	5.08(0.200)
SW-SRXBcc-04	04	11.16(0.439)	7.62(0.300)
SW-SRXBcc-06	06	16.24(0.639)	12.70(0.500)
SW-SRXBcc-08	08	21.32(0.839)	17.78(0.700)
SW-SRXBcc-10	10	26.40(1.039)	22.86(0.900)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK
6	ACCESSORY	UL94V-0 PBT THERMOPLASTIC	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±

DATE

.XXX±


ANG±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

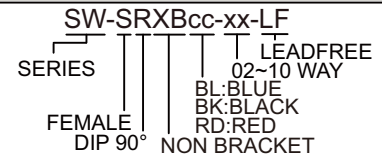

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: