

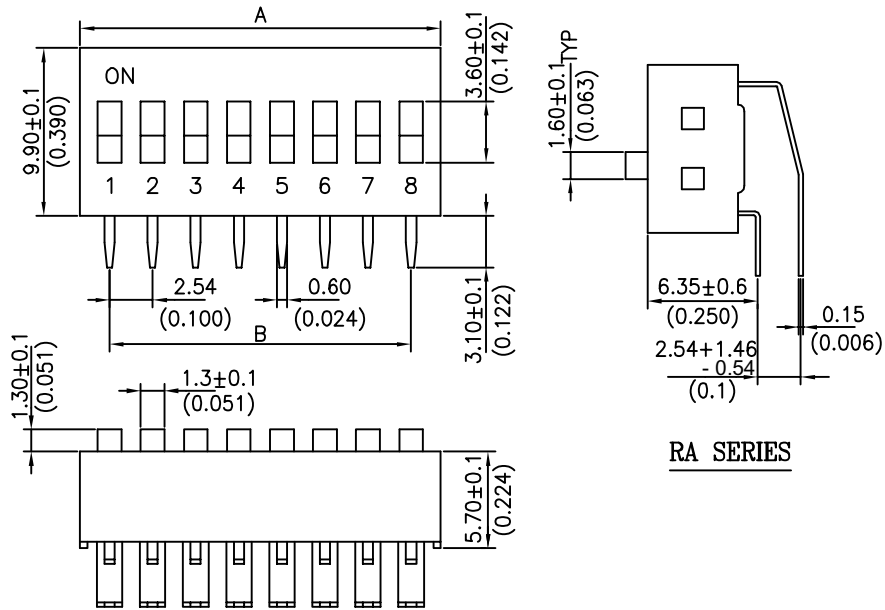
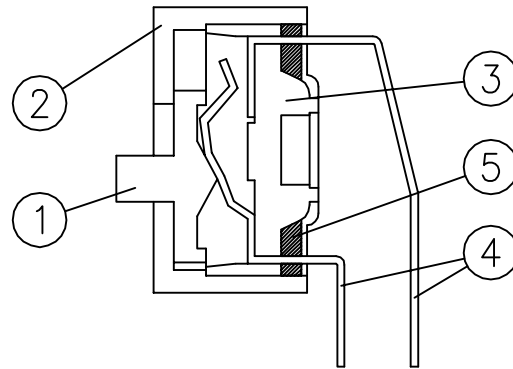


DIMENSION:(UNIT:mm/inches)

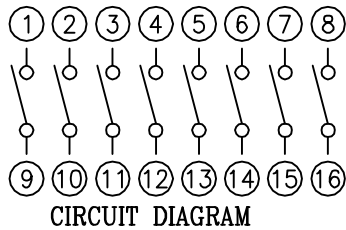

RA SERIES

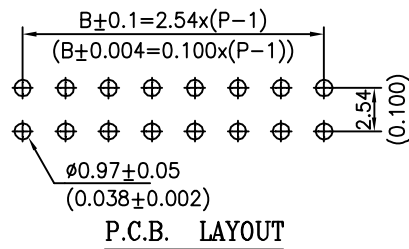

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
SW-SRxx-01	01	3.84(0.151)	————
SW-SRxx-02	02	6.08(0.239)	2.54(0.100)
SW-SRxx-03	03	8.92(0.351)	5.08(0.200)
SW-SRxx-04	04	11.16(0.439)	7.62(0.300)
SW-SRxx-05	05	13.70(0.539)	10.16(0.400)
SW-SRxx-06	06	16.24(0.639)	12.70(0.500)
SW-SRxx-07	07	19.08(0.751)	15.24(0.600)
SW-SRxx-08	08	21.32(0.839)	17.78(0.700)
SW-SRxx-09	09	24.16(0.951)	20.32(0.800)
SW-SRxx-10	10	26.40(1.039)	22.86(0.900)
SW-SRxx-12	12	31.48(1.239)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SW-SRxx-xx-LF
SERIES | LEADFREE
FEMALE | 01-12WAY
BL:BLUE
RD:RED
BK:BLACK
DIP 90°

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com