


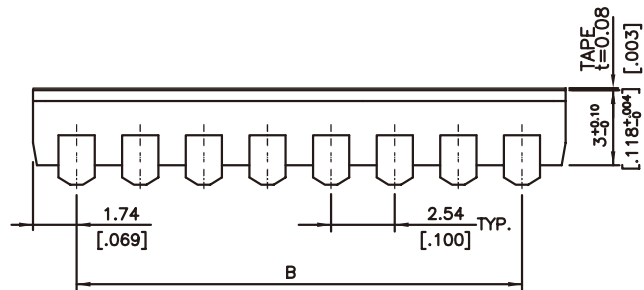


NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES
2. GENERAL TOLERANCES: MAX ±0.20mm.

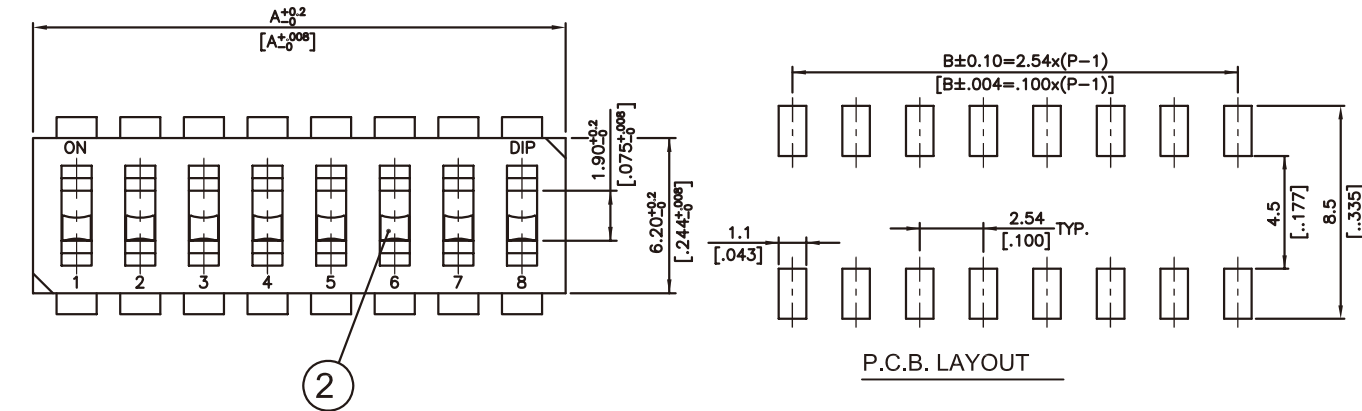

SW-SVJX-xx

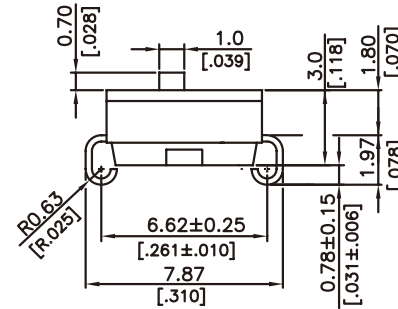

SW-SVJ-xx

SW-SVJ-12 SW-SVJX-12	12	31.42[1.237]	27.94[1.100]
SW-SVJ-10 SW-SVJX-10	10	26.34[1.037]	22.86[.900]
SW-SVJ-09 SW-SVJX-09	9	23.80[.937]	20.32[.800]
SW-SVJ-08 SW-SVJX-08	8	21.26[.837]	17.78[.700]
SW-SVJ-07 SW-SVJX-07	7	18.72[.737]	15.24[.600]
SW-SVJ-06 SW-SVJX-06	6	16.18[.637]	12.70[.500]
SW-SVJ-05 SW-SVJX-05	5	13.64[.537]	10.16[.400]
SW-SVJ-04 SW-SVJX-04	4	11.10[.437]	7.62[.300]
SW-SVJ-03 SW-SVJX-03	3	8.56[.337]	5.08[.200]
SW-SVJ-02 SW-SVJX-02	2	6.02[.237]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC(TYP.)			
(1,2,3,4,5,6,7,8,9,10,12,POS AVAIL)			

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

SW-SVJ-xx-LF
SERIES
LEADFREE
02~12WAY
J TYPE
180°SMT
SLIDE

DESCRIPTION: J TYPE DIP SWITCH