
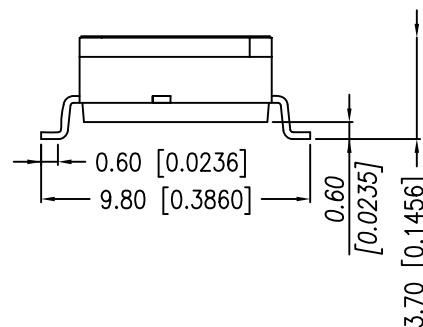
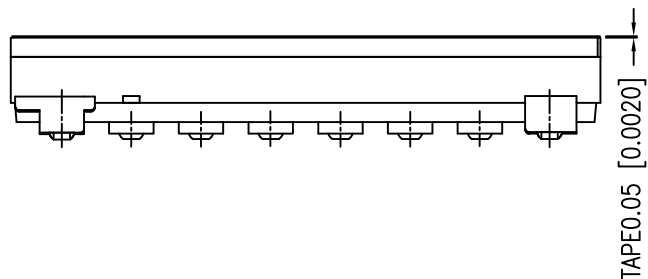
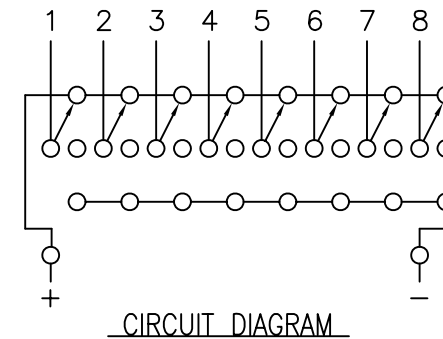
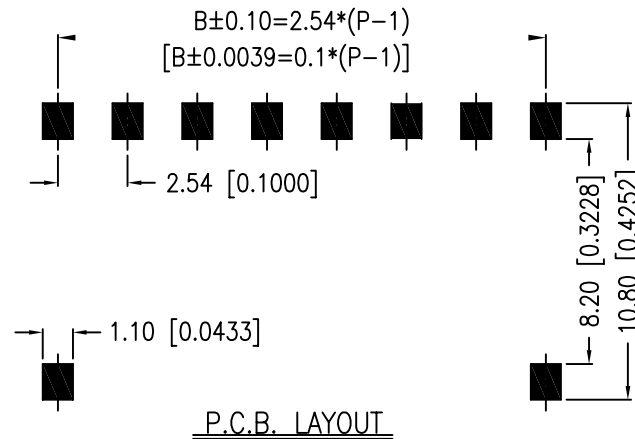


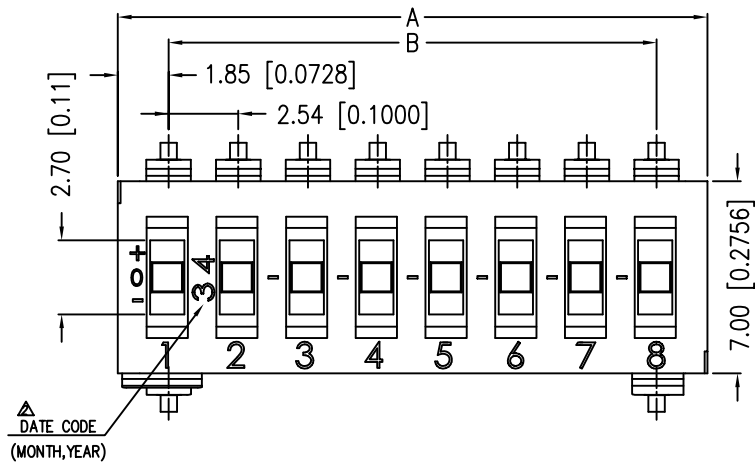

SW3-SVXC-10	10	26.56[1.046]	22.86[.900]
SW3-SVXC-09	9	24.02[.946]	20.32[.800]
SW3-SVXC-08	8	21.48[.846]	17.78[.700]
SW3-SVXC-05	5	13.86[.546]	10.16[.400]
SW3-SVXC-04	4	11.32[.446]	7.62[.300]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS,BRACKETED DIMENSIONS ARE IN INCHES.
- 2.GENERAL TOLERANCES MAX.±0.20mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SW3-SVXCR-xx-LF
SERIES | | | | | LEADFREE
04~10WAY
REEL
TAPE
SLIDE | RECESSED/ACTUATOR
180°SMT

DESCRIPTION: TIMR-T TYPE

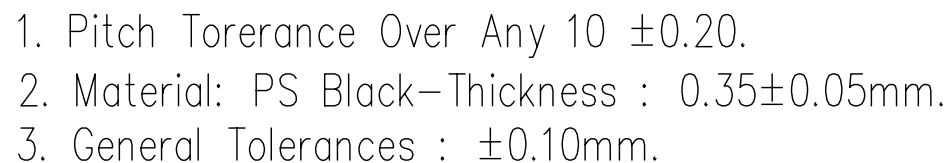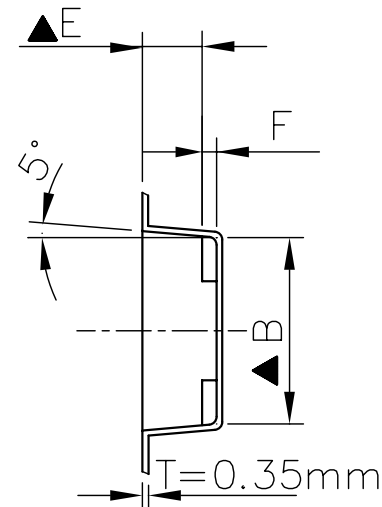

06	24±0.3	11.5±0.1	16.60±0.1	6±0.1	6±0.1	3.5	0.9
05	24±0.3	11.5±0.1	14.15±0.1	3±0.1	6±0.1	4.5	0.4
04	24±0.3	11.5±0.1	11.56±0.1	6±0.1	6±0.1	3.5	0.9
03	24±0.3	11.5±0.1	9.07±0.1	3±0.1	6±0.1	4.5	0.4
02	16±0.3	7.5±0.1	6.50±0.1	3±0.1	6±0.1	3.5	0.9
NO:	W±0.3	A	B	C	D	E	F